

Technical Drawings

- Models
 - Used for design and analysis
 - SolidWorks, I-DEAS, Pro-E, ...
- Component Drawings
 - Used to specify fabrication or procurement of parts
 - AutoCad, Pro-E, Solid Works ...
- Assembly Drawings
 - Used to specify assembly of parts
 - AutoCad, Pro-E, SolidWorks ...
- **This lecture covers component drawings and tolerances**
- References
 - Earle, J. H., *Engineering Design Graphics* (Addison-Wesley, 1983)
 - ASME Y14.5M Dimensioning and tolerancing

Component Drawings

- Orthographic projection
- Isometric layout
- Dimensioning
- Tolerancing

3-view orthographic projection



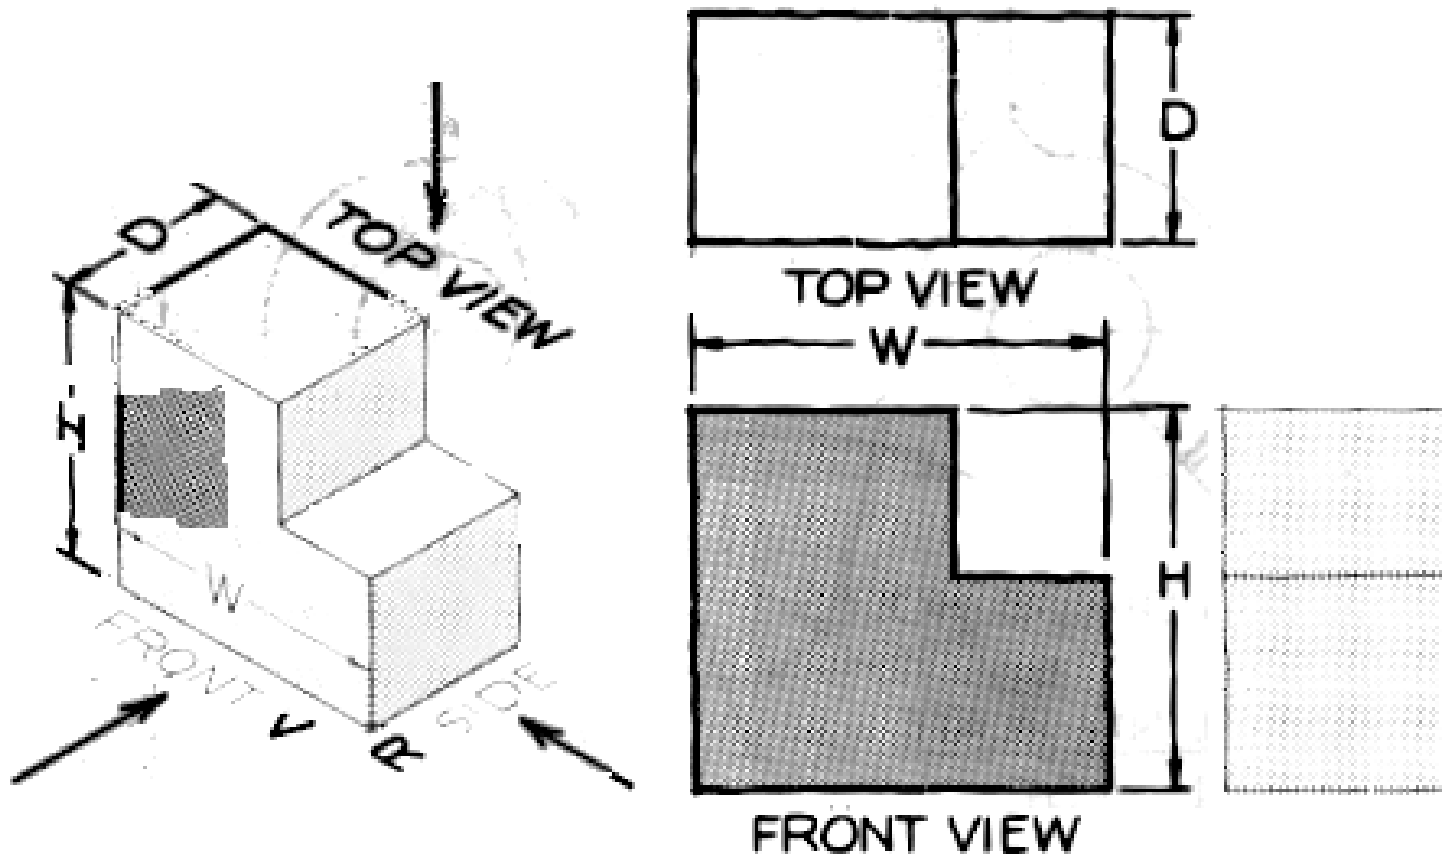



Fig. 13.1 Three views of an object can be found by looking at the object in this manner. The three views—the top, front, and right side—describe the object.

Views and projections

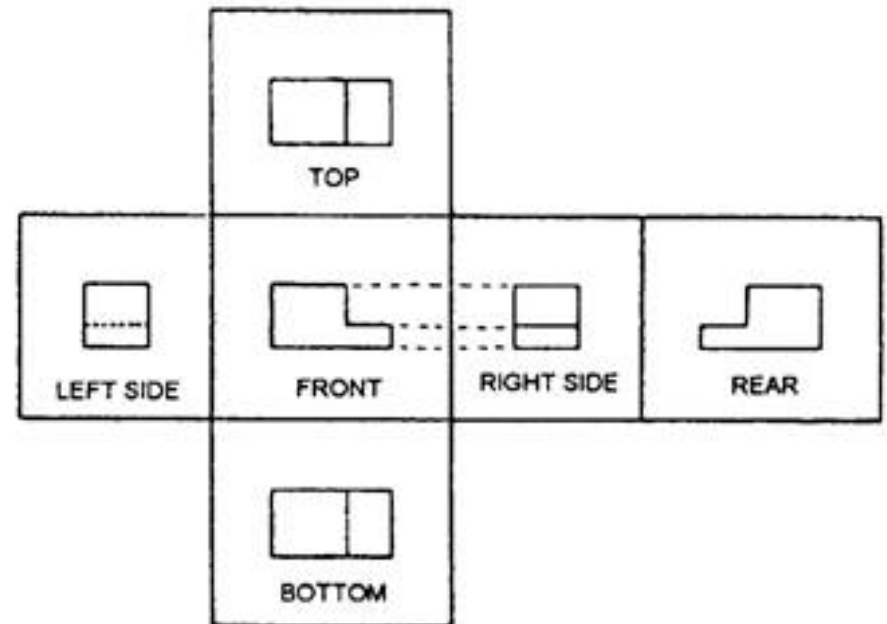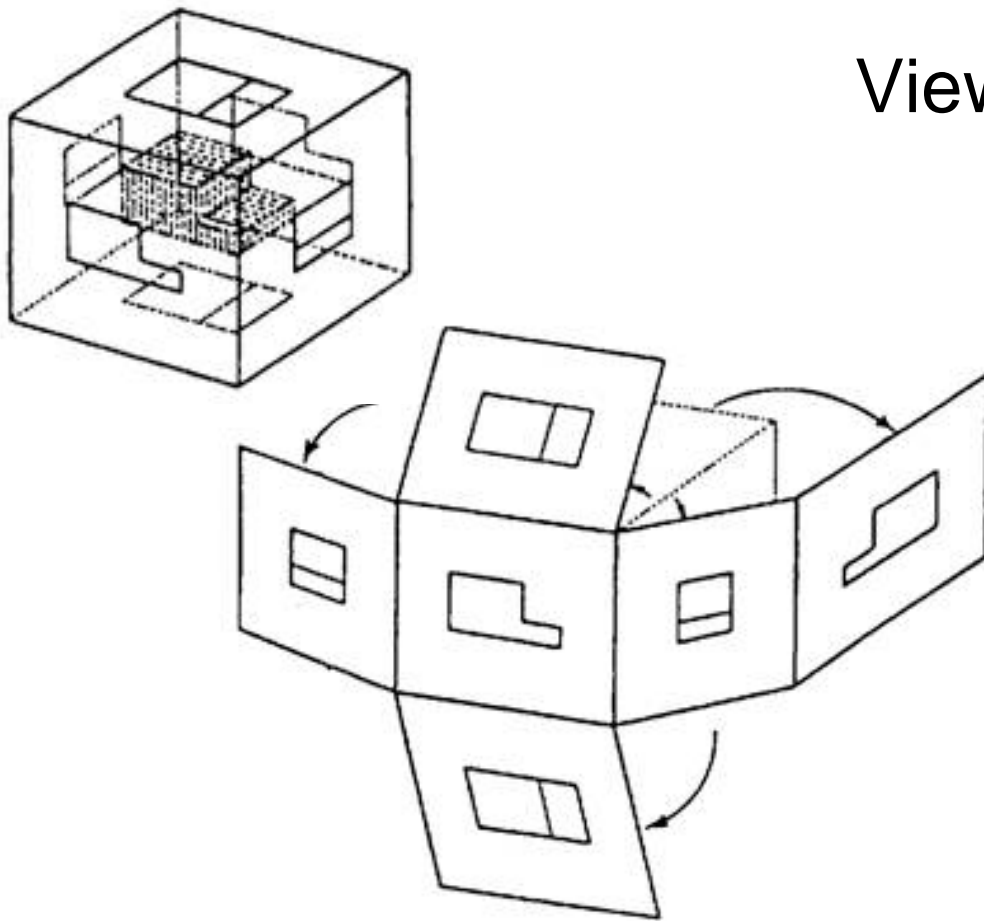

Inclined planes

Fig. 13.10 Views of planes

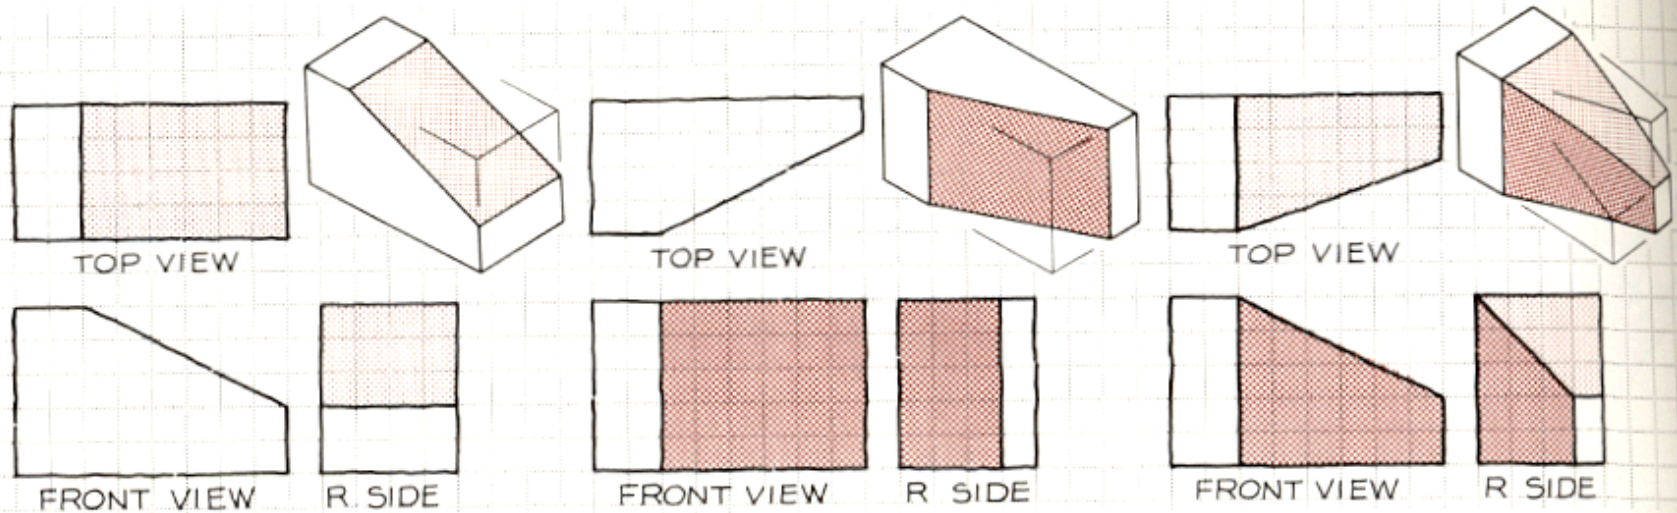


A. The plane appears as an edge in the front view and it is foreshortened in the top and side views.

B. The plane is an edge in the top view and it is foreshortened in the front and side views.

C. These two planes appear foreshortened in the right-side view. Each appears as an edge in either the top or front views.

Hidden lines

Fig. 13.13 Missing lines

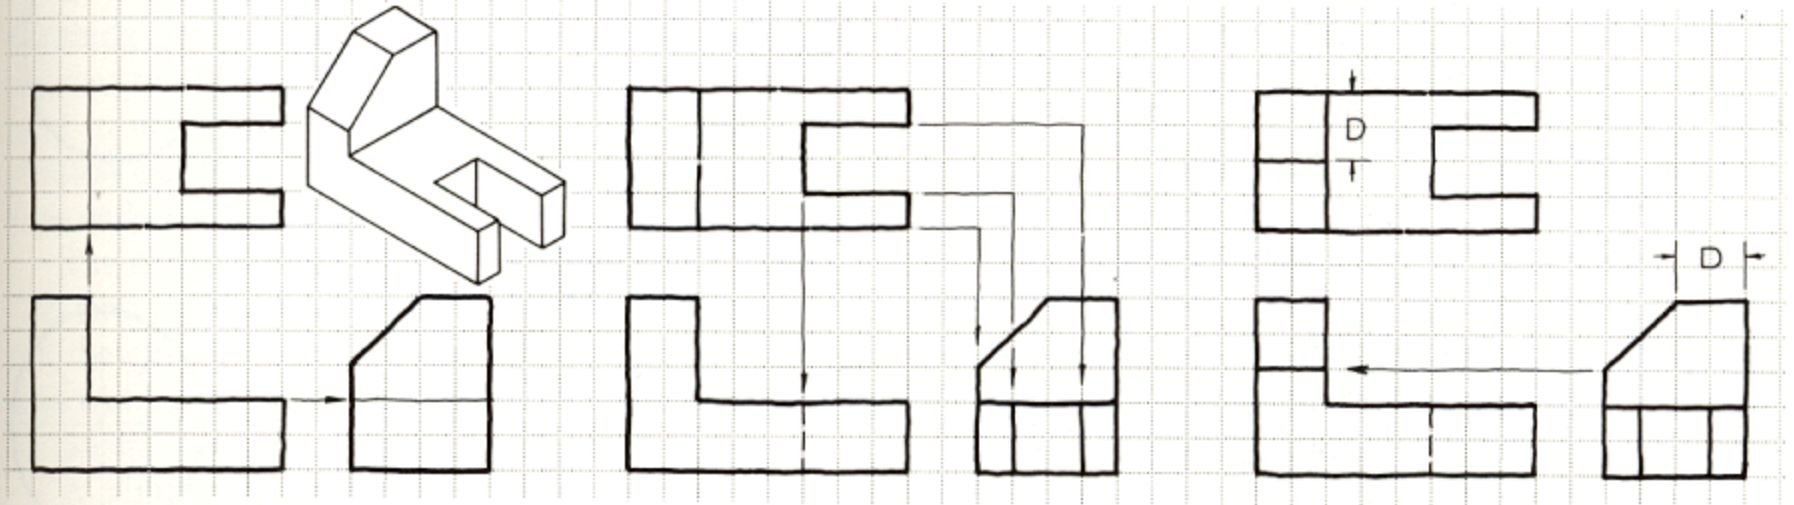

Step 1 Lines may be missing in all views in this type of problem. The first missing line is found by projecting the edges of the planes from the front to the top and side views.

Step 2 The notch in the top view is projected to the front and side views. The line in the front view is a hidden line.

Step 3 The line formed by the beveled surface is found in the front view by projecting from the side view.

Holes and cylinders

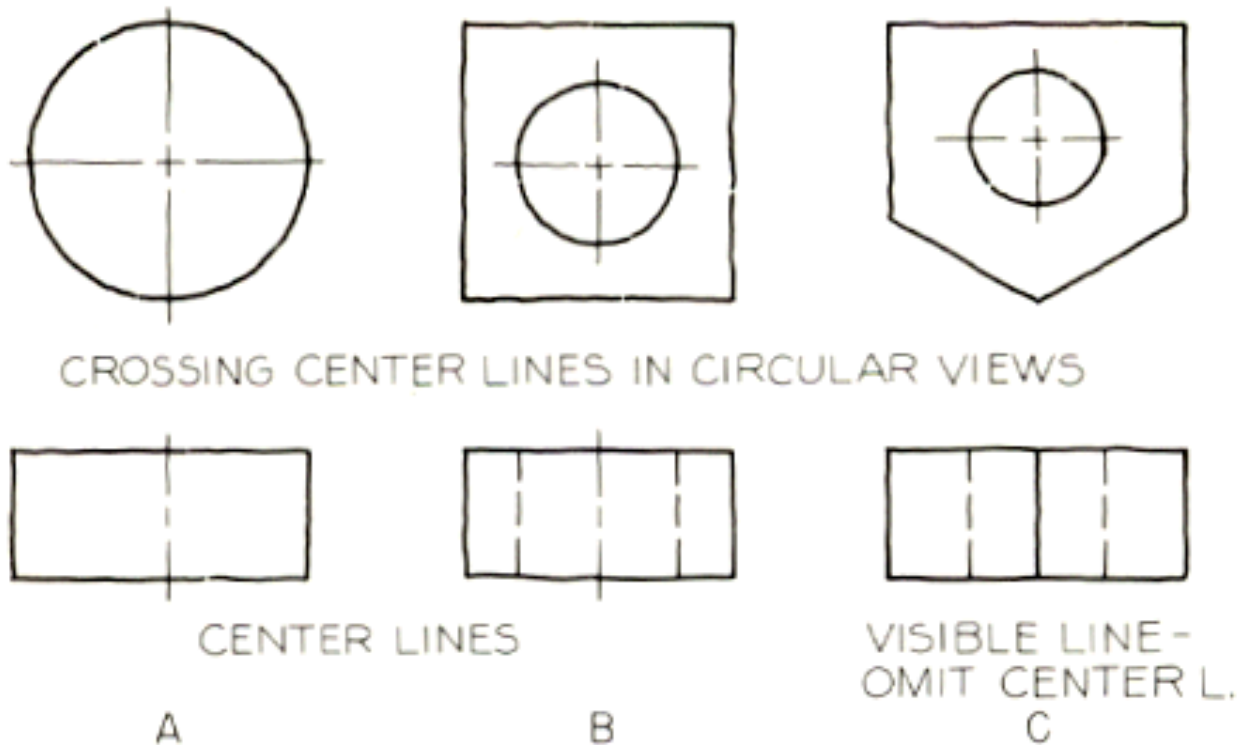


Fig. 13.14 Center lines are used to indicate the centers of circles and the axes of cylinders. These are drawn as very thin lines. When they coincide with visible or hidden lines, center lines are omitted.

Concentric cylinders

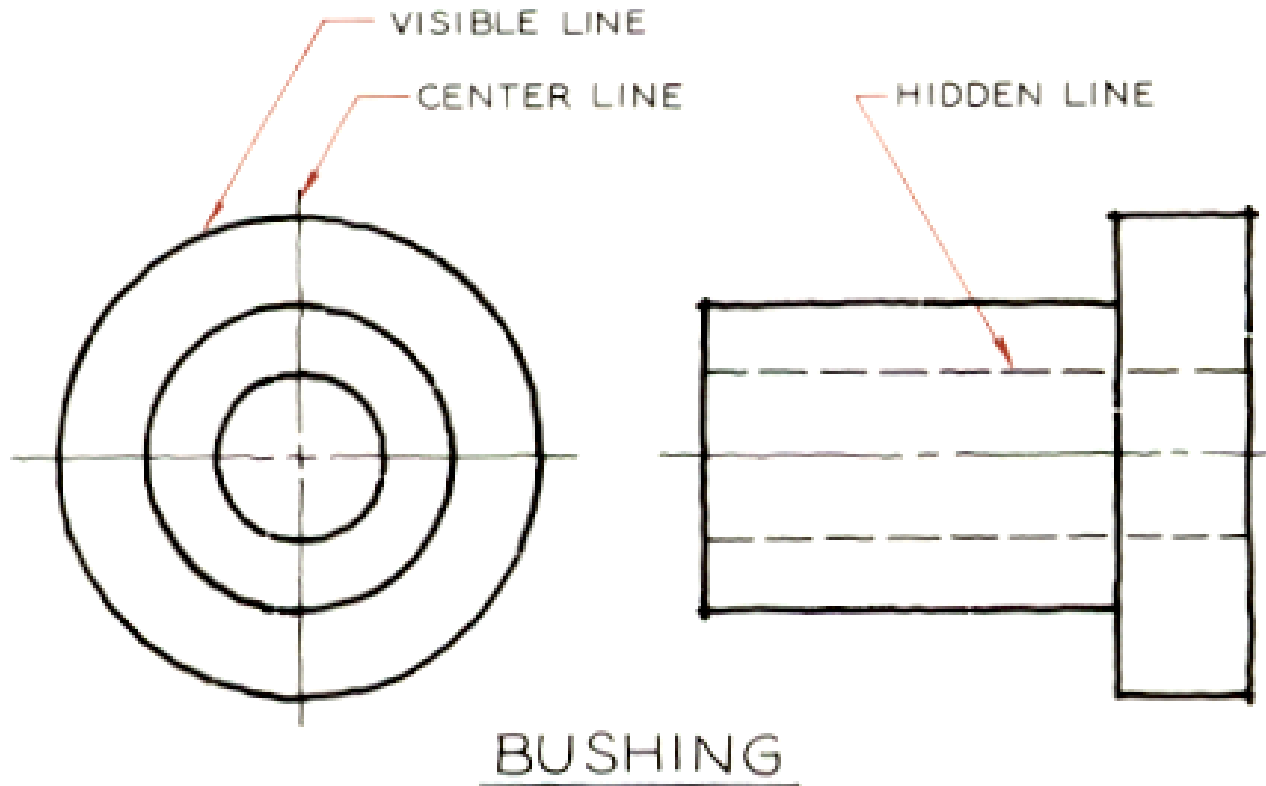


Fig. 13.16 Here you can see the application of center lines of concentric cylinders, and the relative weight of hidden, visible, and center lines.

Auxiliary views

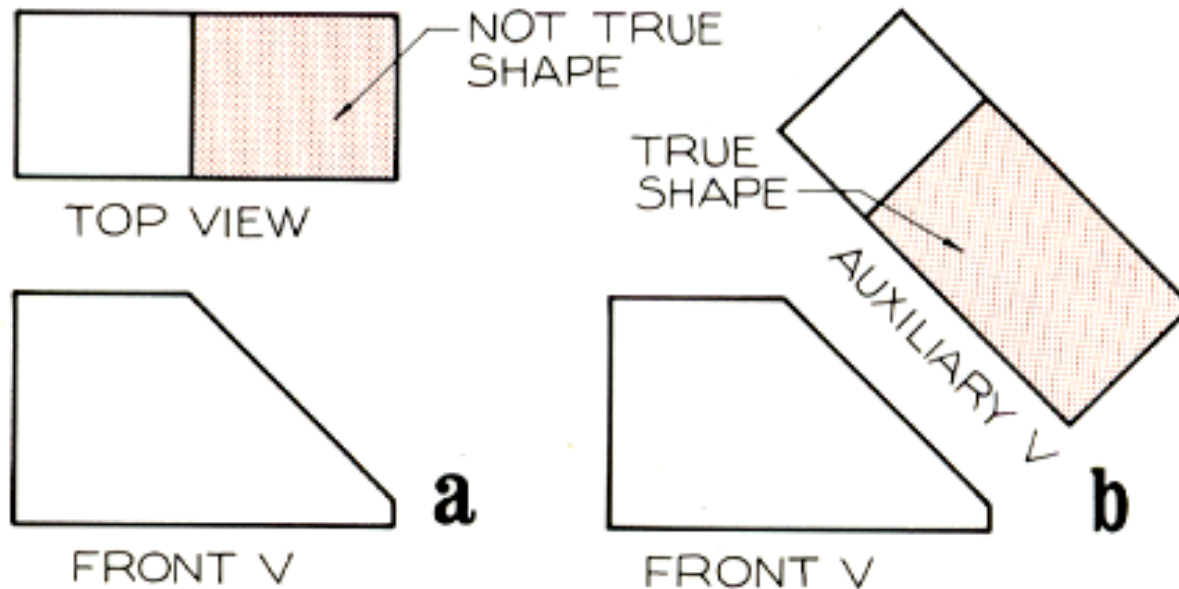


Fig. 15.1 When a surface appears as an inclined edge in a principal view, it can be found true size by an auxiliary view. The top view at **a** is foreshortened, but this plane is true size in an auxiliary view at **b**.

Auxiliary views

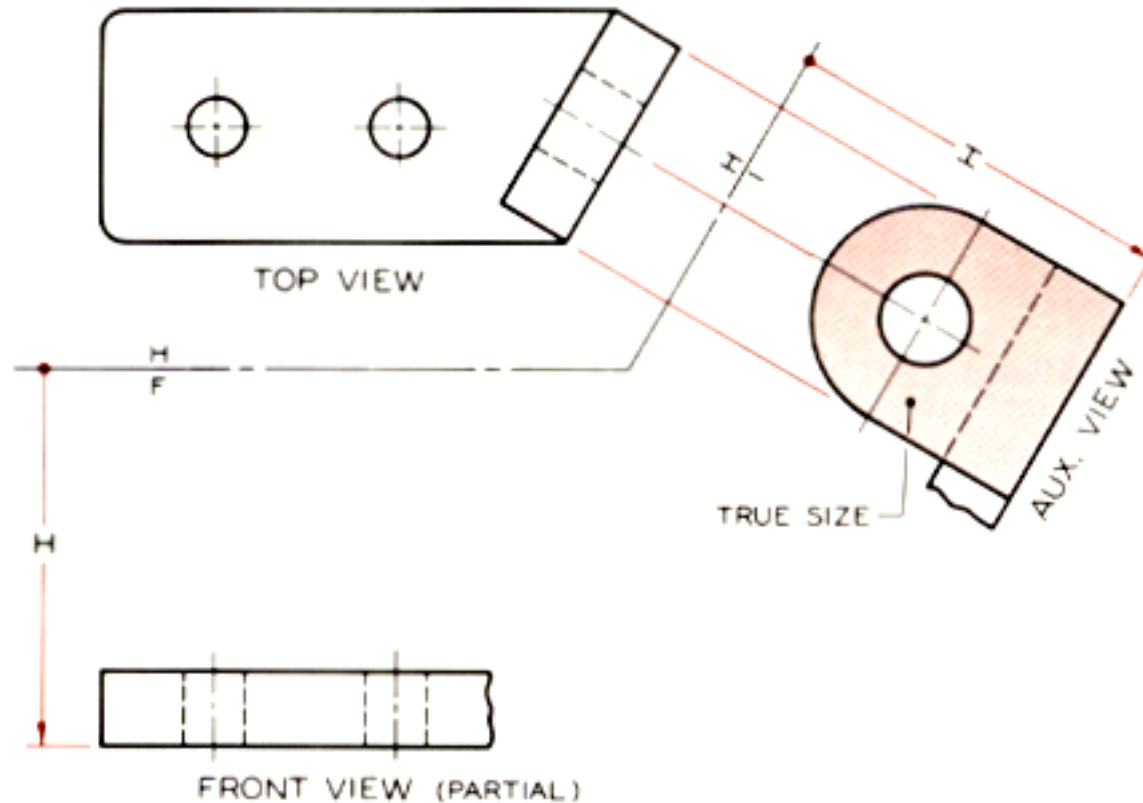


Fig. 15.6 When the object is drawn on a sheet of paper, it would be laid out in this manner. The front view is drawn as a partial view since the omitted part is shown true size in the auxiliary view.

Section views

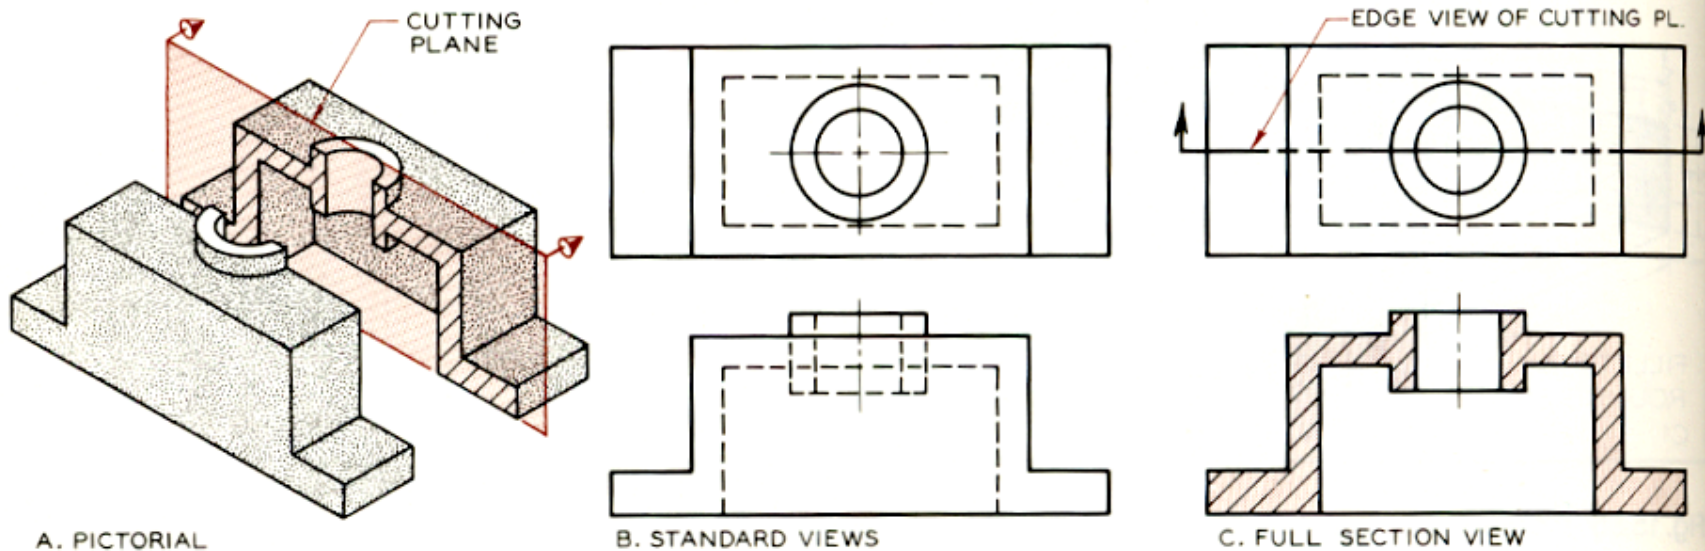


Fig. 16.1 A comparison of a regular orthographic view with a full-section view of the same object to show the internal features as well as the external features.

Half section views

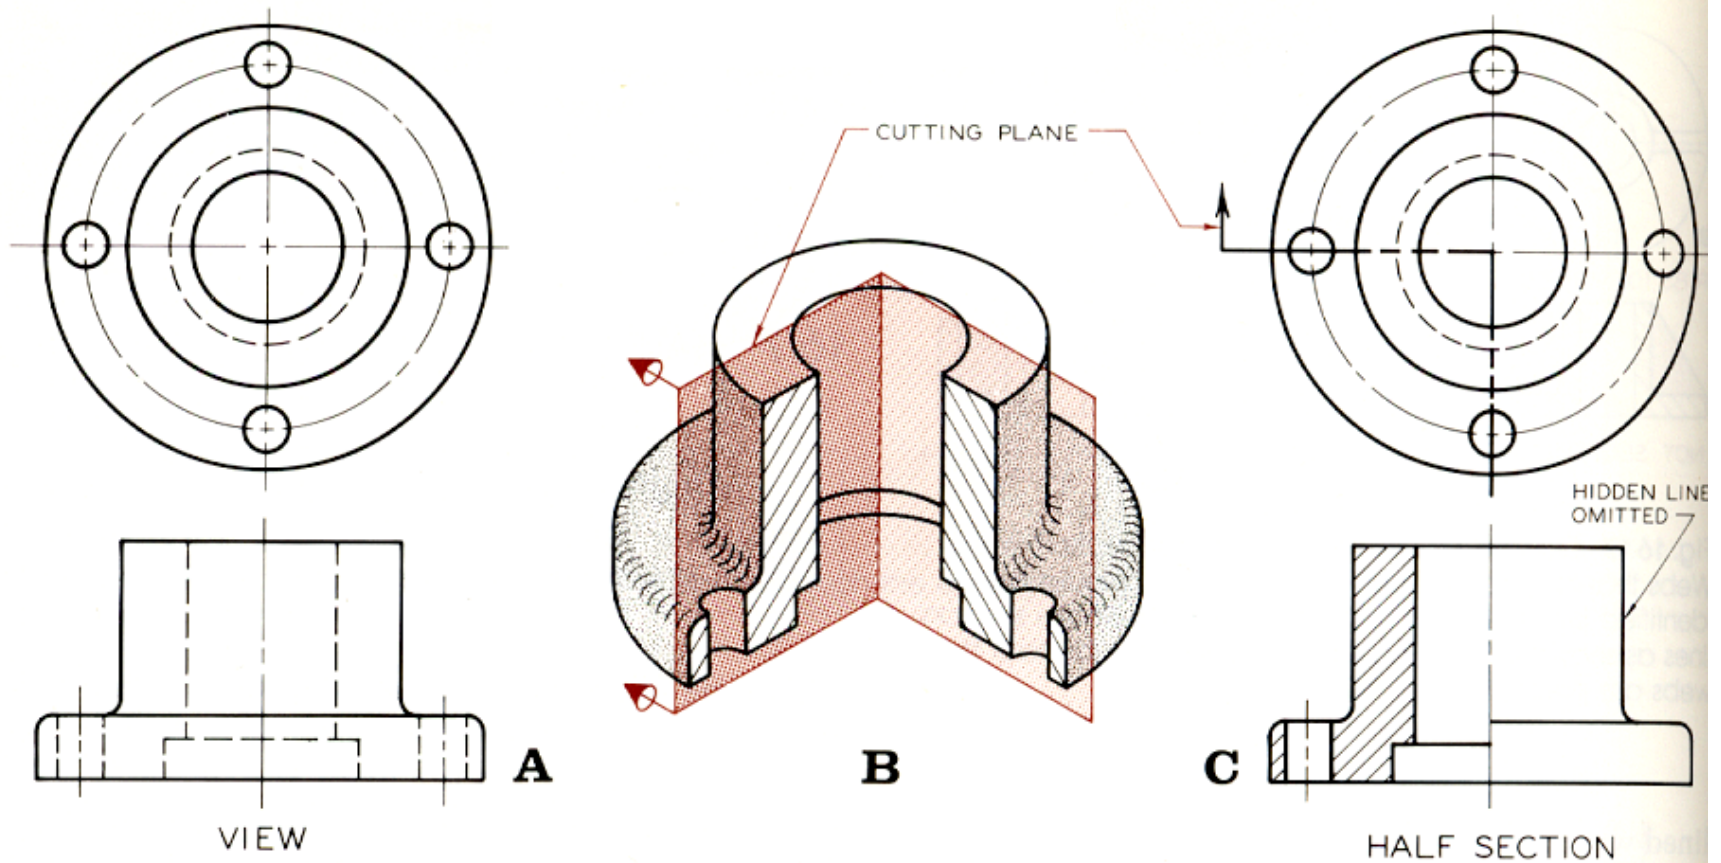


Fig. 16.19 The cutting plane of a half-section passes halfway through the object, which results in a sectional view that shows half of the outside and half of the inside of the object. Hidden lines are omitted unless they are necessary to clarify the view.

Pictorial (3D) drawings


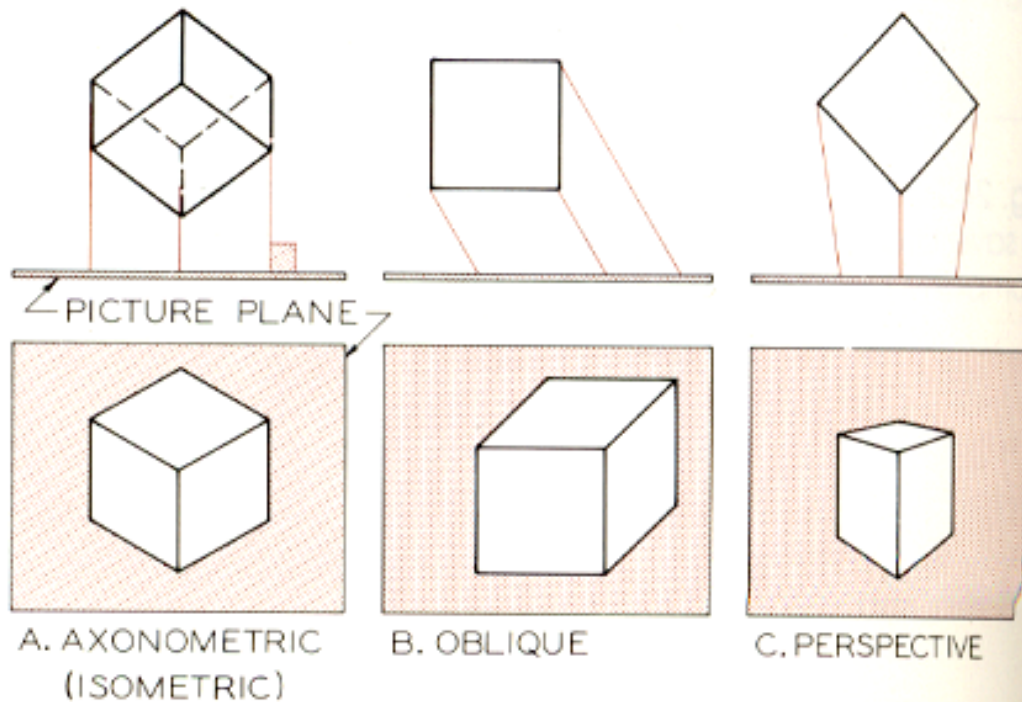


Fig. 25.2 Types of projection systems for pictorials. (A) Axonometric pictorials are formed by parallel projectors that are perpendicular to the picture plane. (B) Obliques are formed by parallel projectors that are oblique to the picture plane. (C) Perspectives are formed by converging projectors that make varying angles with the picture plane.

Isometric layout

Fig. 25.28 Layout of an isometric drawing (simple)

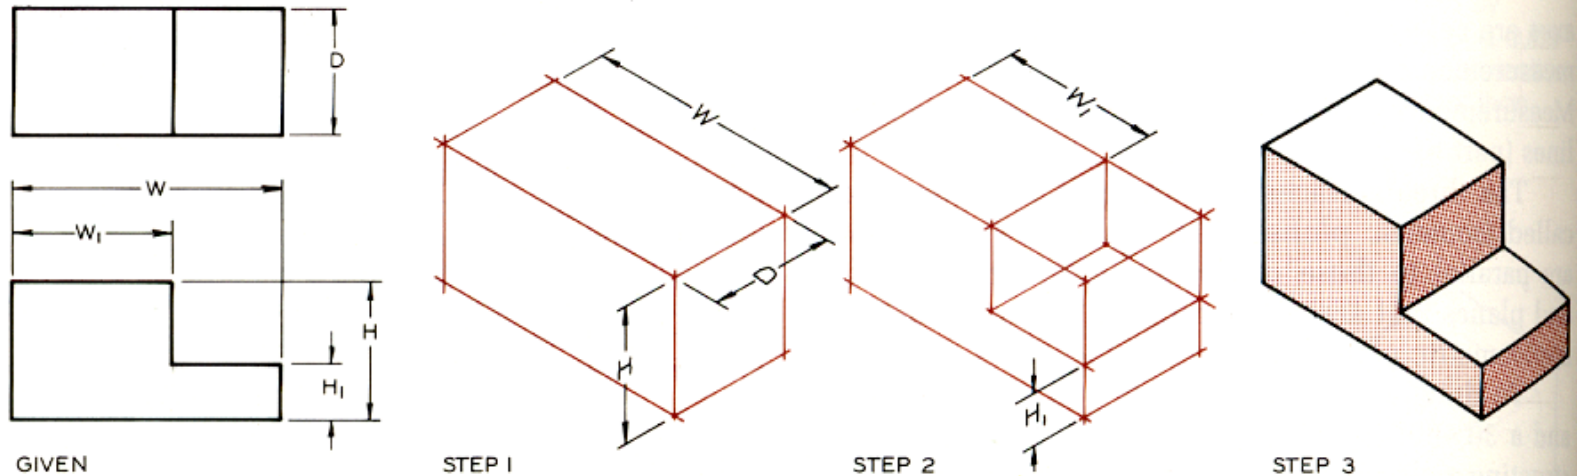


Step 1 The object is blocked in using the overall dimensions. The notch is removed.

Step 2 The inclined plane is located by establishing its end points.

Step 3 The lines are strengthened to complete the drawing.

Isometric drawings (2)

Fig. 25.29 Layout of an isometric drawing (complex)

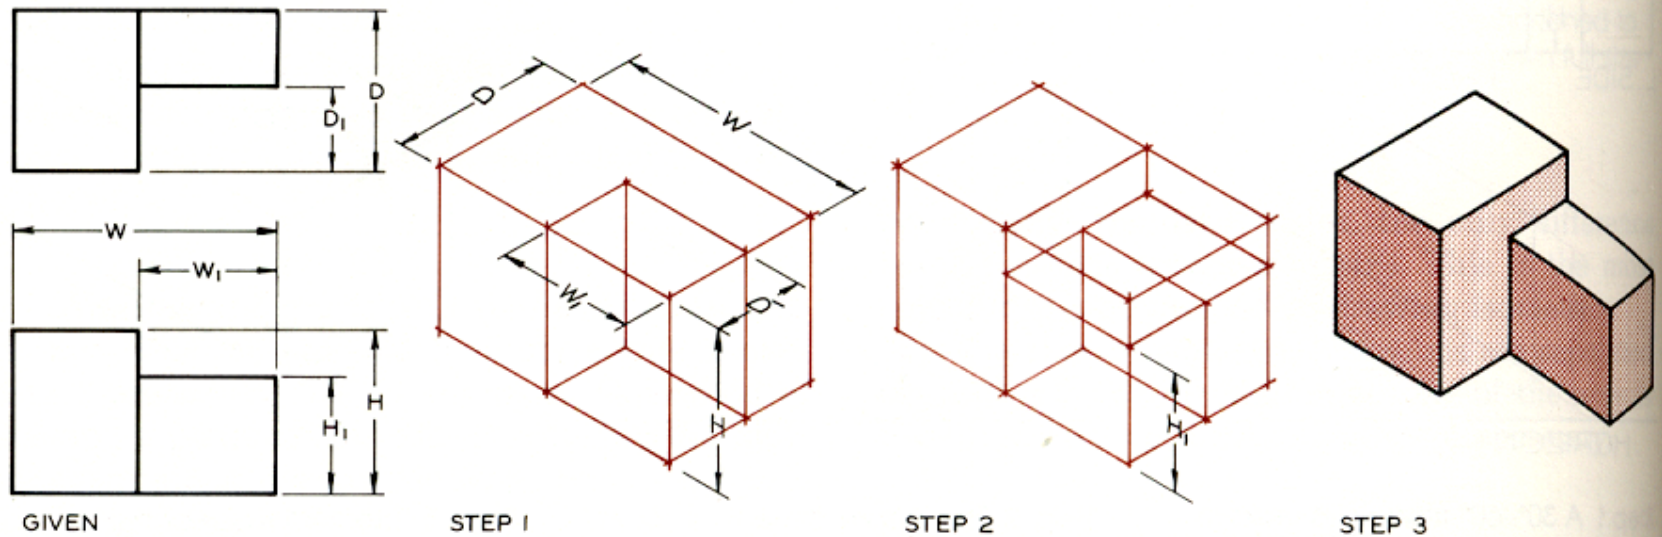

Step 1 The overall dimensions of the object are used to lightly block in the object. One notch is removed by using dimensions taken from the given views.

Step 2 The second notch is removed using dimension H_1 .

Step 3 The final lines of the isometric are strengthened.

Cylinders in isometric

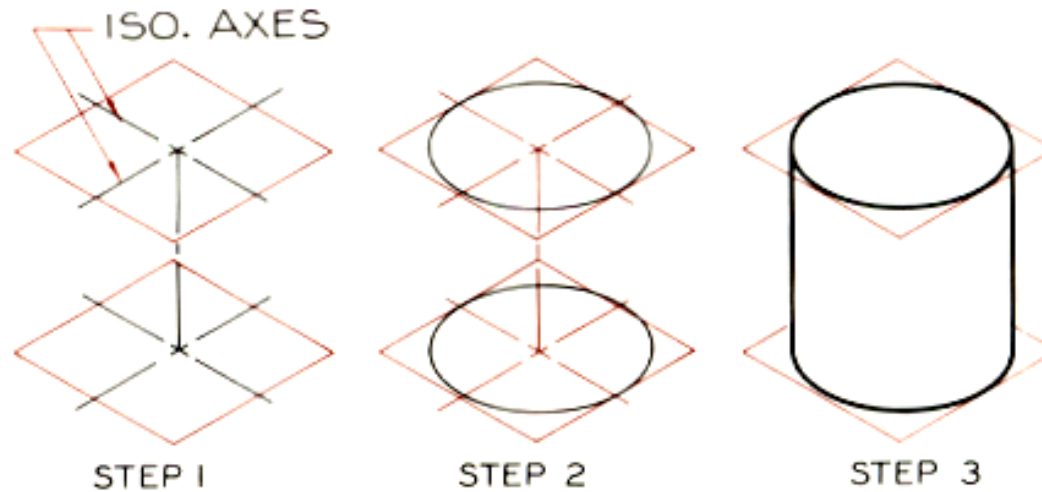


Fig. 25.40 Cylinder: four-center method

Step 1 A rhombus is drawn in isometric at each end of the cylinder's axis.

Step 2 A four-center ellipse is drawn within each rhombus.

Step 3 Lines are drawn tangent to each rhombus to complete the isometric drawing.

Linear dimensions

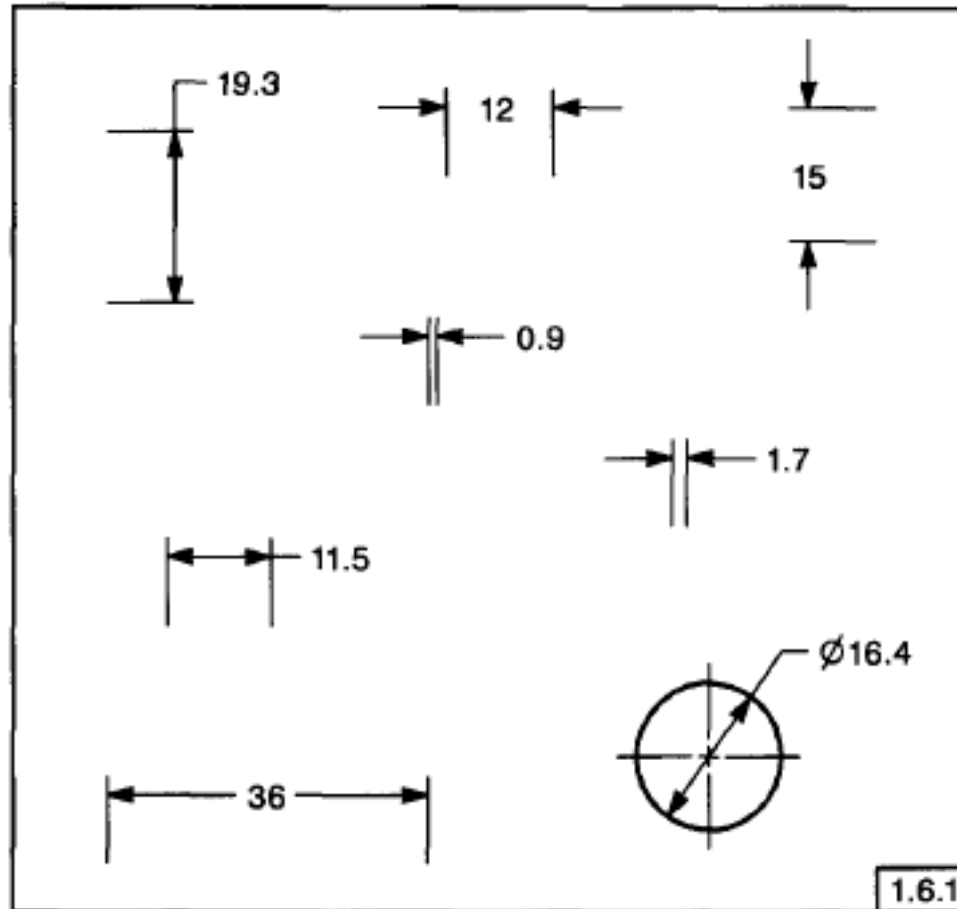


FIG. 1-2 MILLIMETER DIMENSIONS

Angular dimensions

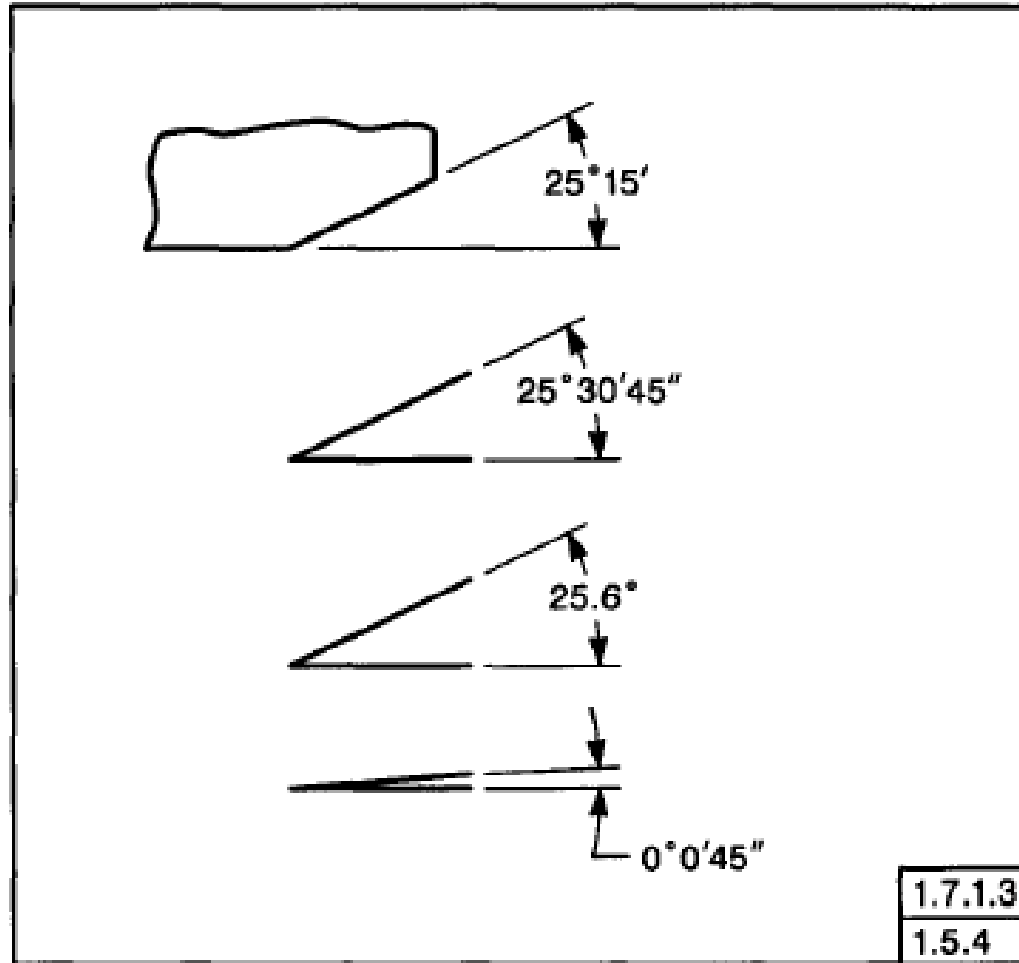


FIG. 1-1 ANGULAR UNITS

Grouping of dimensions

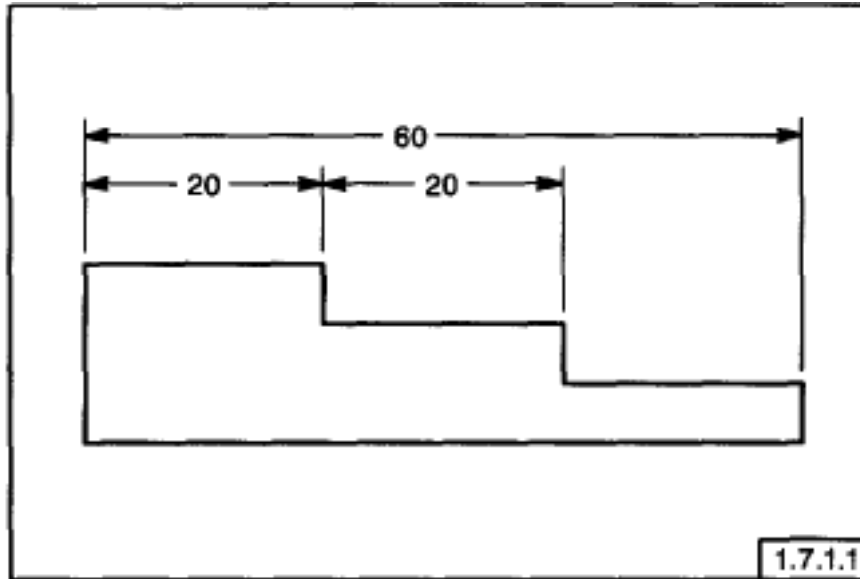


FIG. 1-5 GROUPING OF DIMENSIONS

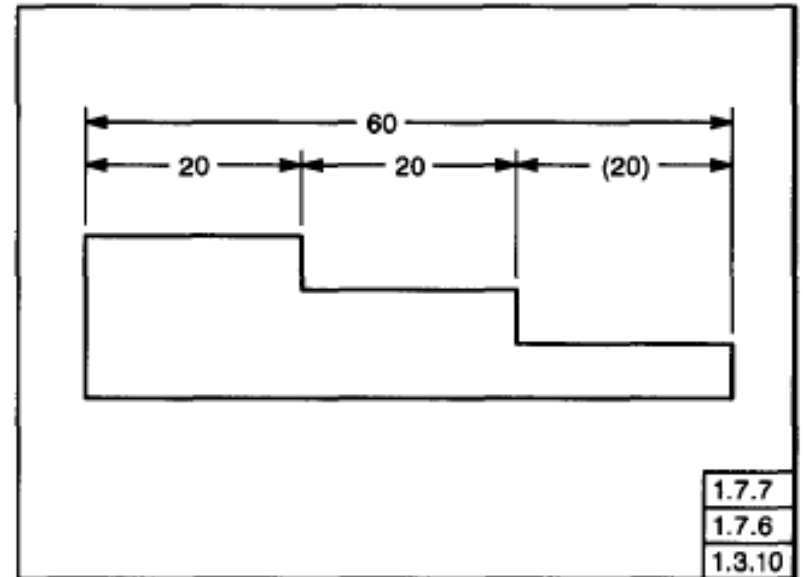


FIG. 1-17 INTERMEDIATE REFERENCE DIMENSION

Application of dimensions

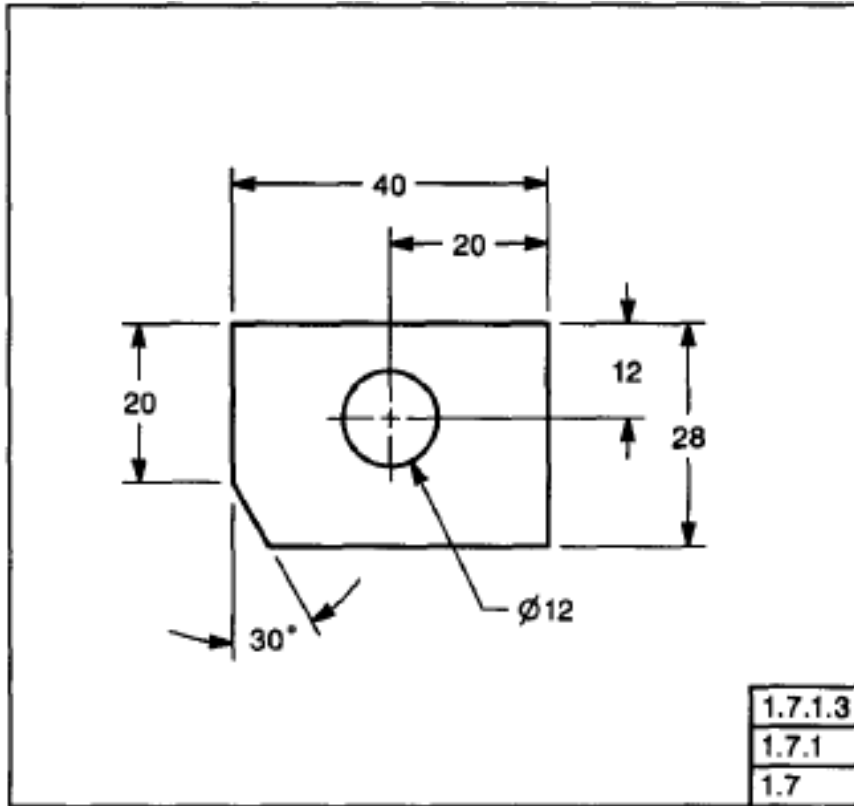


FIG. 1-4 APPLICATION OF DIMENSIONS

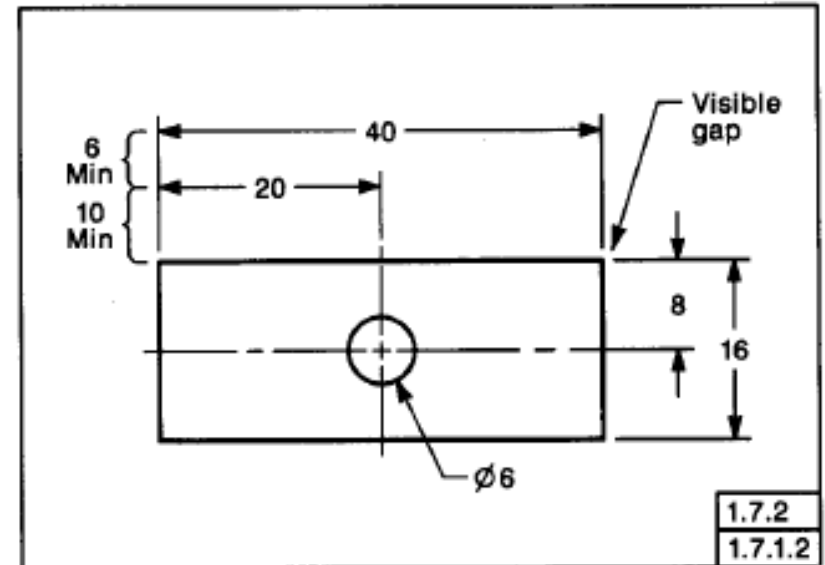


FIG. 1-6 SPACING OF DIMENSION LINES

Staggered dimensions

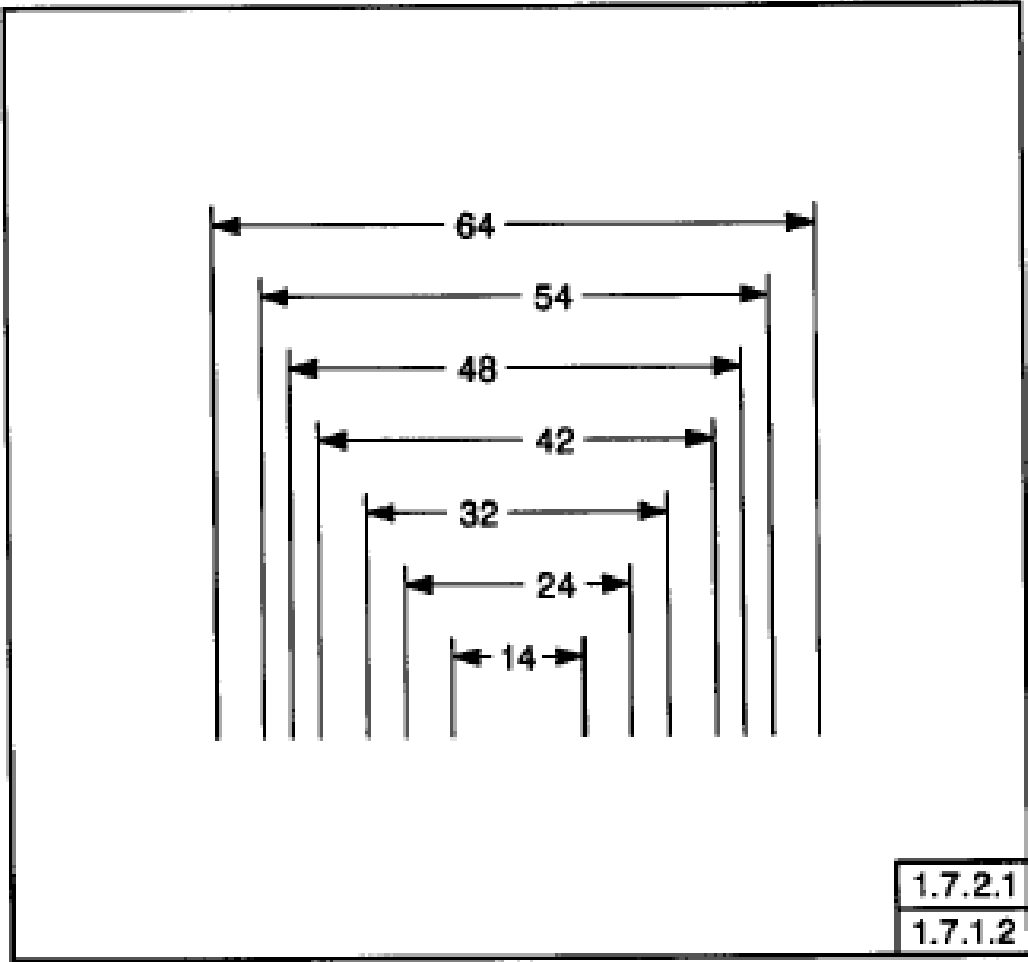


FIG. 1-7 STAGGERED DIMENSIONS

Leaders

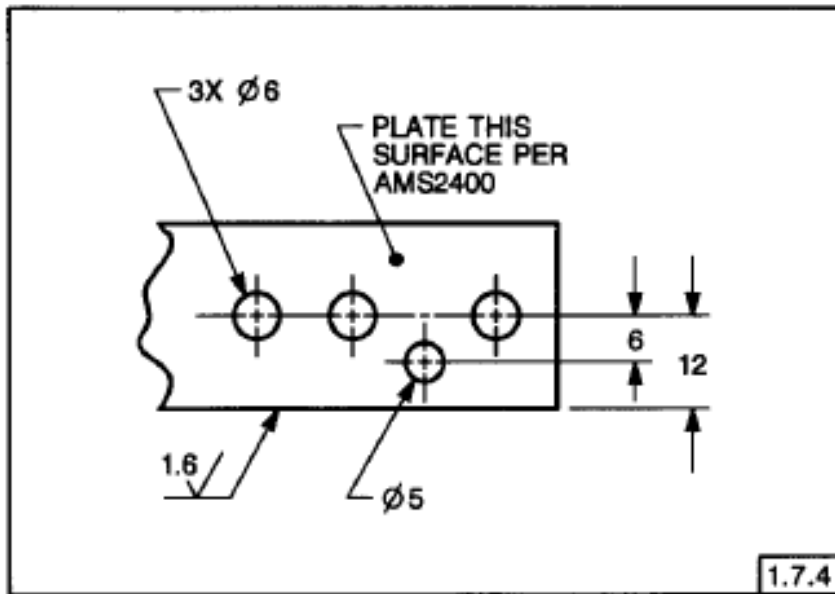


FIG. 1-12 LEADERS

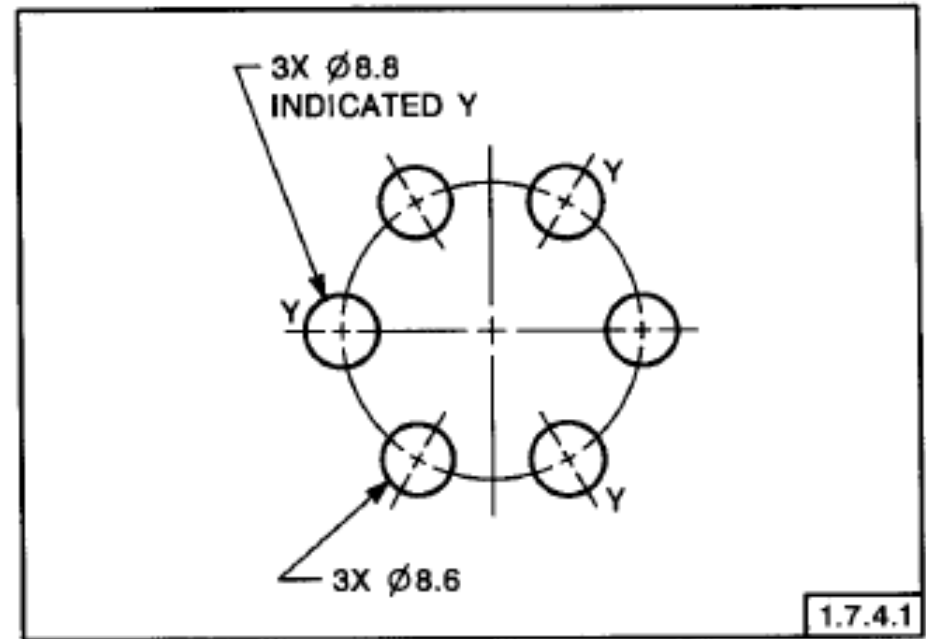


FIG. 1-14 MINIMIZING LEADERS

Diameters, radii

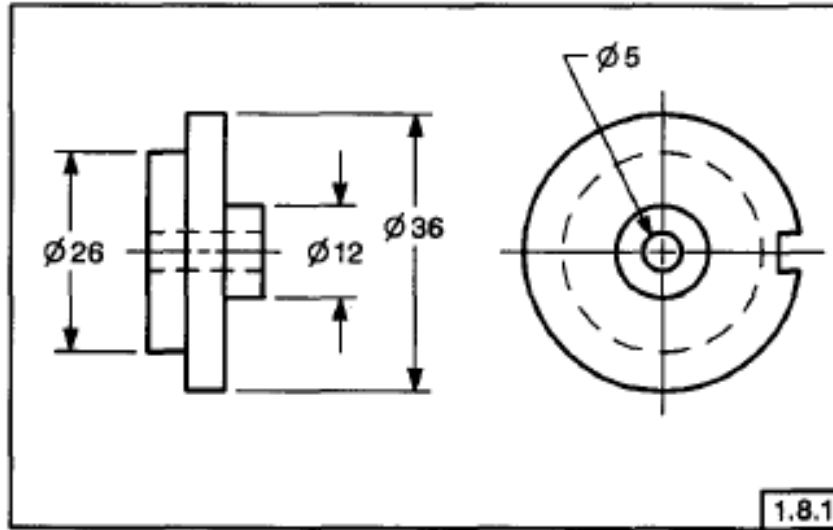


FIG. 1-19 DIAMETERS



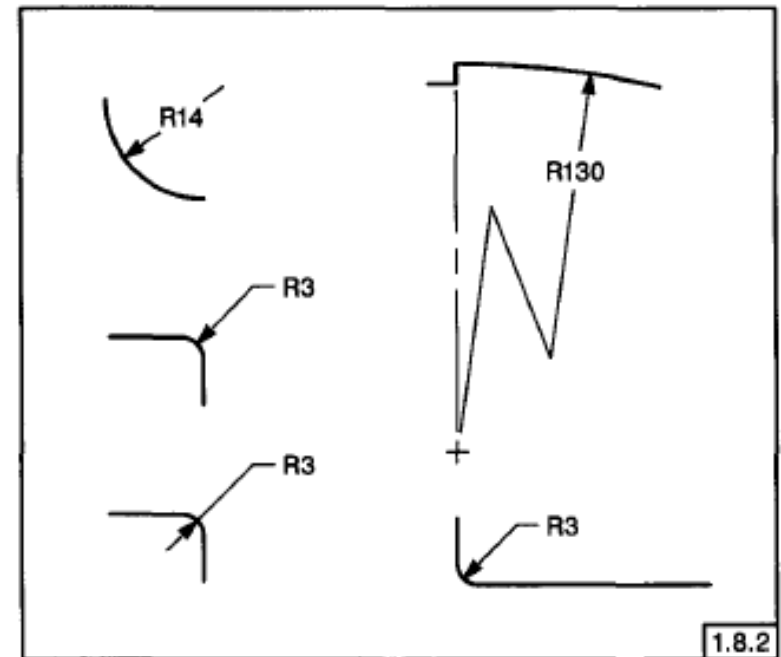


FIG. 1-20 RADII

Tabular dimensions

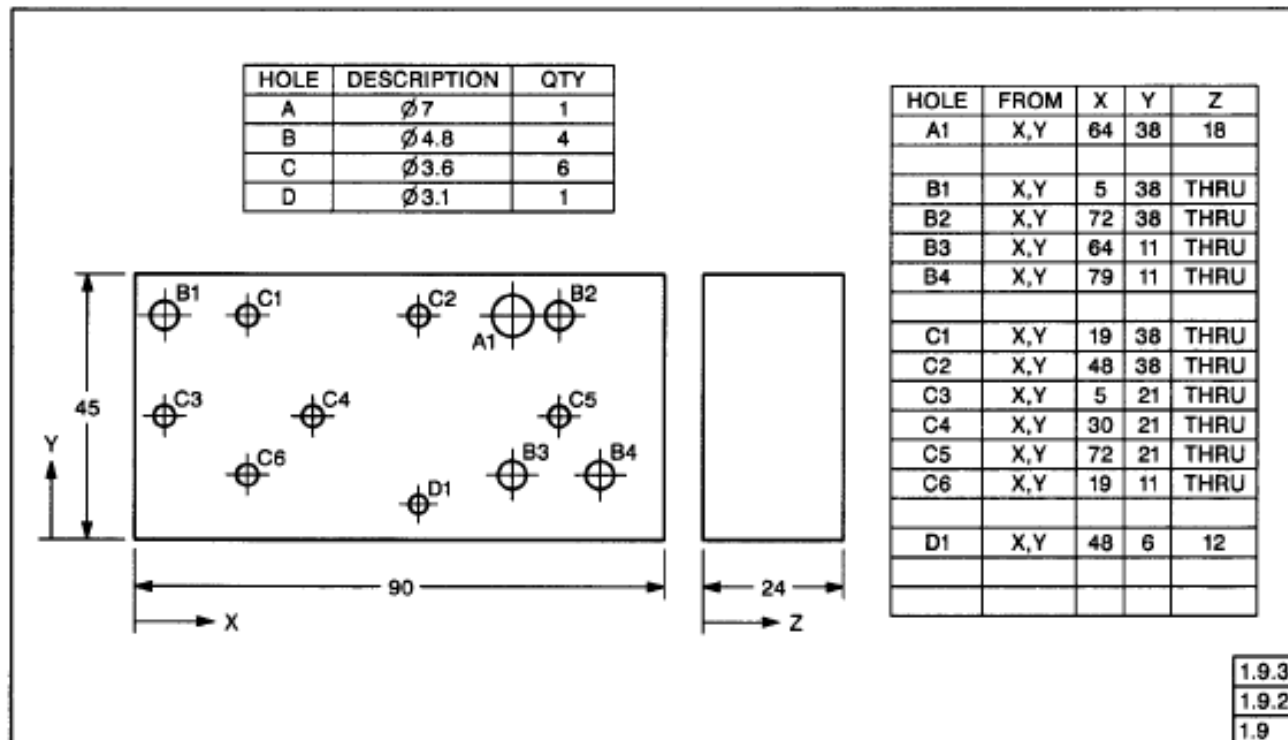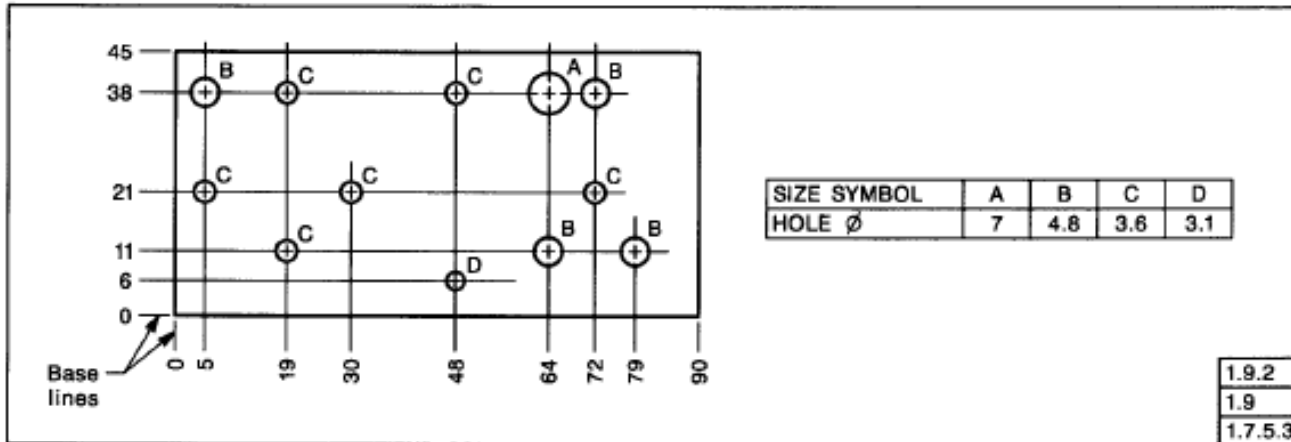

Tolerances



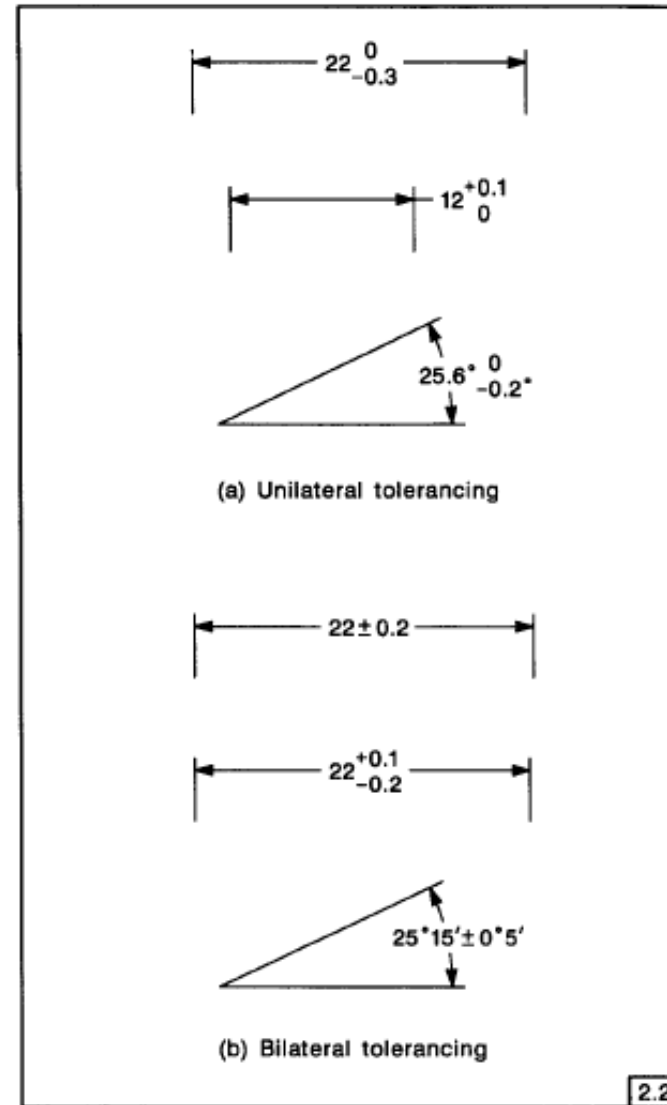


FIG. 2-2 PLUS AND MINUS TOLERANCING

Default tolerances

Can be specified in Title Block of drawing

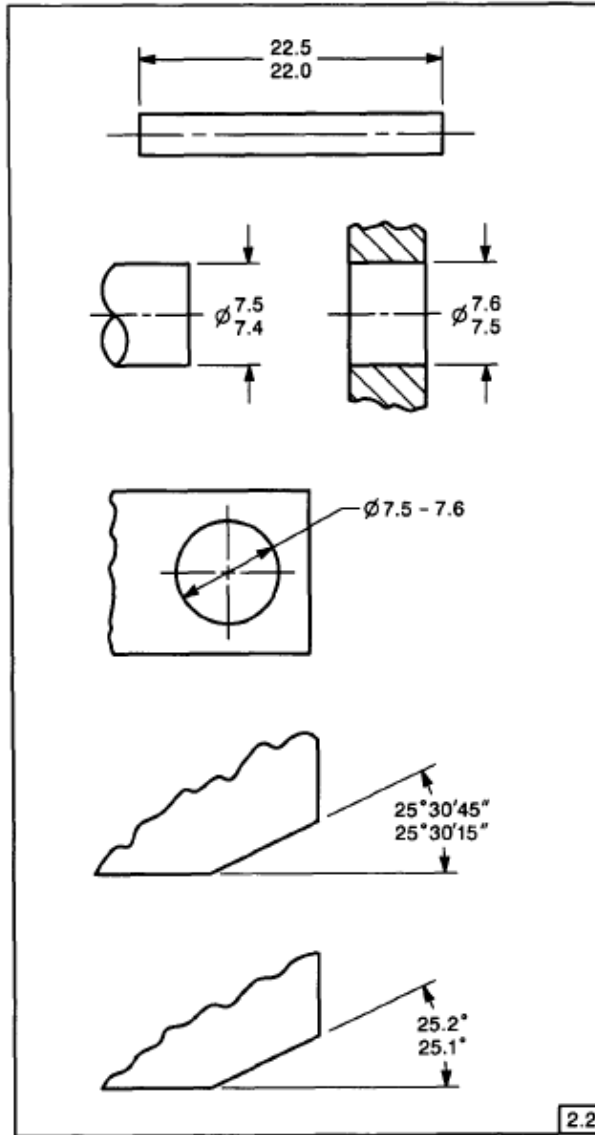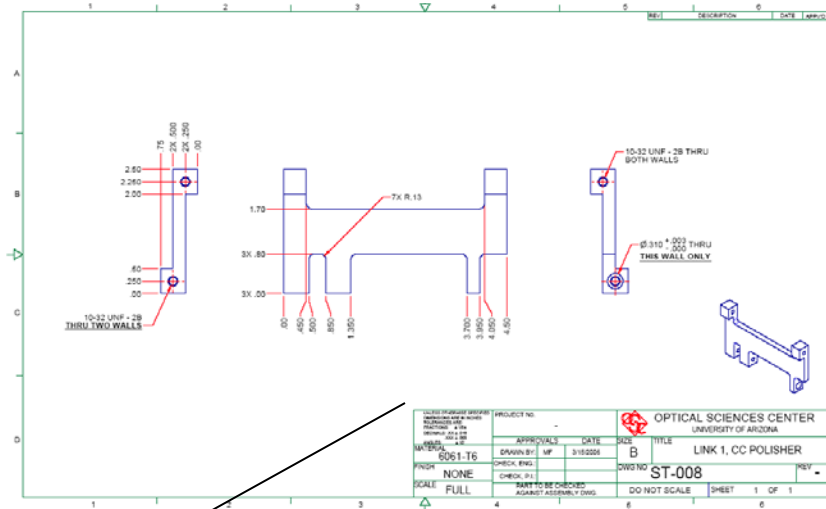

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS: ± 1/64 DECIMALS: .XX ± .010 .XXX ± .005 ANGLES: ± 10'	PROJECT No. -		APPROVALS		DATE 3/15/2006	SIZE B	TITLE LINK 1, CC POLISHER	
	MATERIAL 6061-T6	DRAWN BY: MF	CHECK, ENG.:	CHECK, P.I.:	DWG NO ST-008	REV -		
FINISH NONE	PART TO BE CHECKED AGAINST ASSEMBLY DWG.		DO NOT SCALE	SHEET 1 OF 1				

Specification of datum

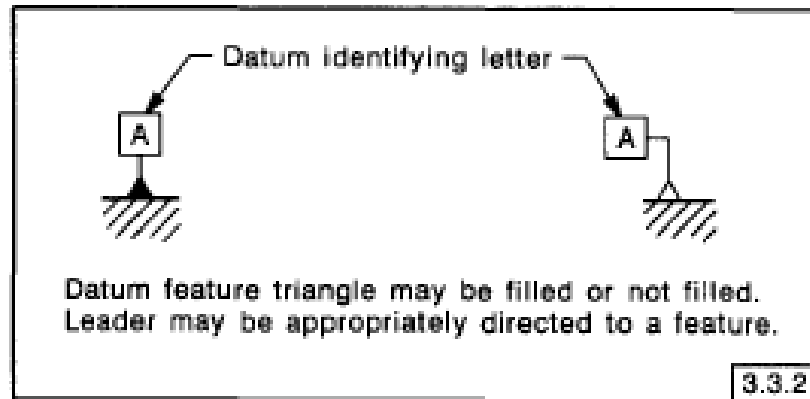


FIG. 3-2 DATUM FEATURE SYMBOL

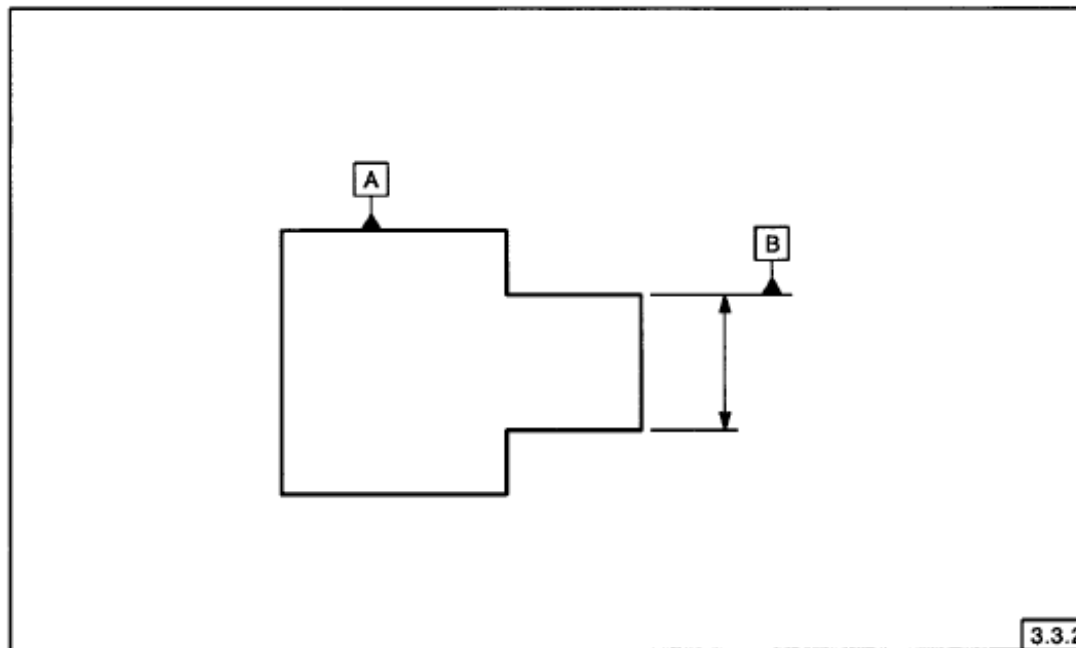


FIG. 3-3 DATUM FEATURE SYMBOLS ON A FEATURE SURFACE AND AN EXTENSION LINE

Datum reference frame

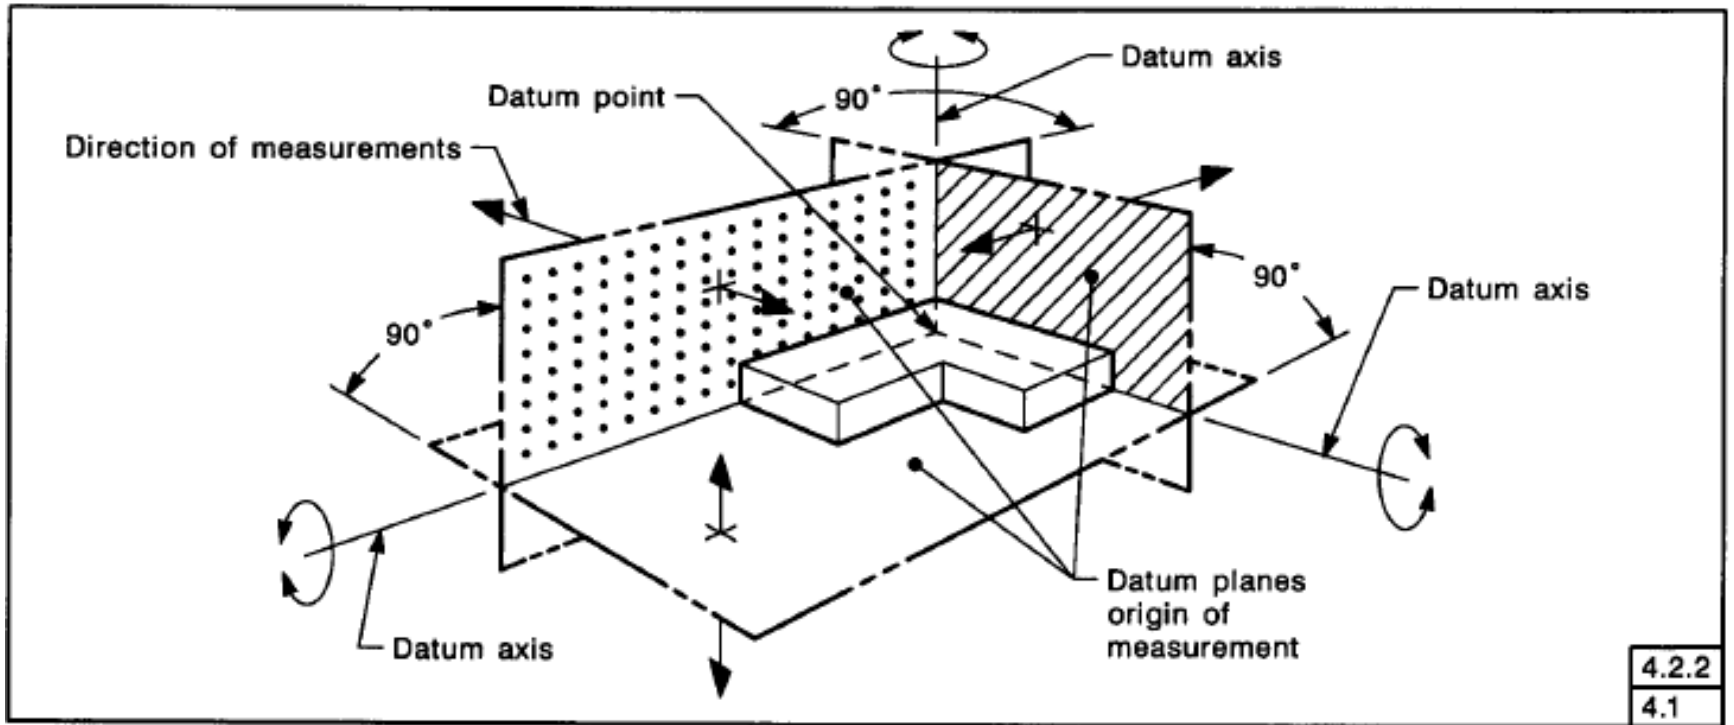


FIG. 4-1 DATUM REFERENCE FRAME

Reference to datum

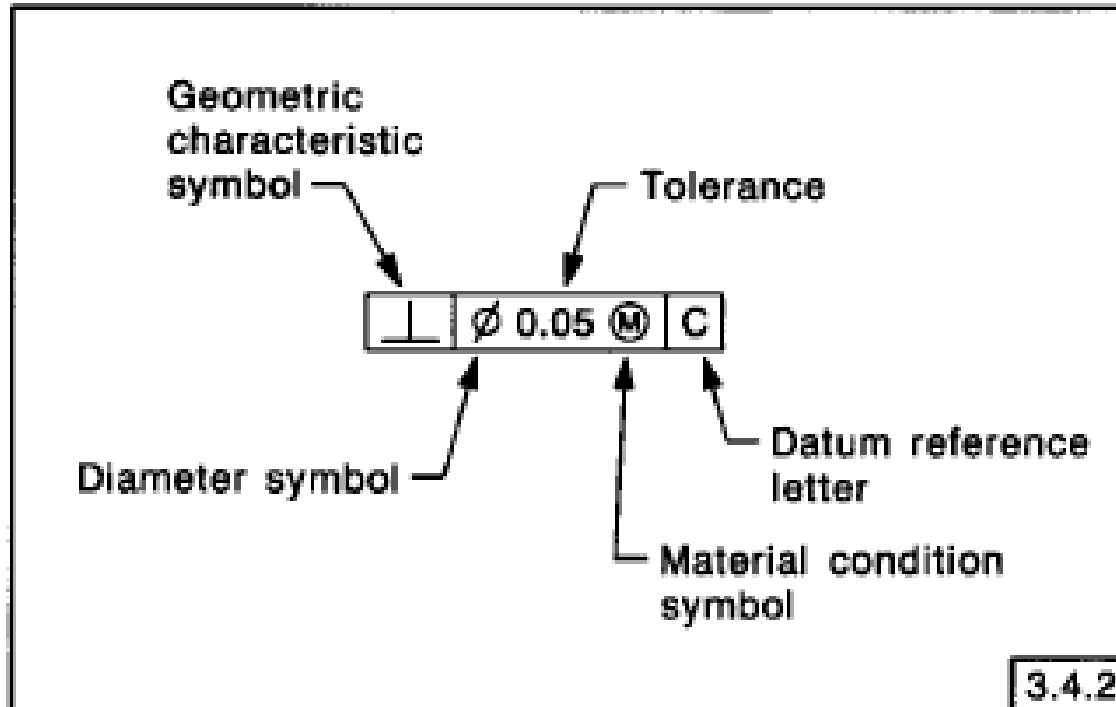


FIG. 3-20 FEATURE CONTROL FRAME INCORPORATING A DATUM REFERENCE















MMC = Maximum Material Condition

LMC = Least Material Condition

Modifying symbols

TERM	SYMBOL	SEE:
AT MAXIMUM MATERIAL CONDITION	Ⓜ	3.3.5
AT LEAST MATERIAL CONDITION	Ⓛ	3.3.5
PROJECTED TOLERANCE ZONE	Ⓟ	3.3.6
FREE STATE	ⓕ	3.3.19
TANGENT PLANE	Ⓣ	3.3.20
DIAMETER	∅	3.3.7
SPHERICAL DIAMETER	S∅	3.3.7
RADIUS	R	3.3.7
SPHERICAL RADIUS	SR	3.3.7
CONTROLLED RADIUS	CR	3.3.7
REFERENCE	()	3.3.8
ARC LENGTH	⌒	3.3.9
STATISTICAL TOLERANCE	ⓈⓉ	3.3.10
BETWEEN	↔	3.3.11

Geometric characteristic symbols

	TYPE OF TOLERANCE	CHARACTERISTIC	SYMBOL	SEE:
FOR INDIVIDUAL FEATURES	FORM	STRAIGHTNESS		6.4.1
		FLATNESS		6.4.2
		CIRCULARITY (ROUNDNESS)		6.4.3
		CYLINDRICITY		6.4.4
FOR INDIVIDUAL OR RELATED FEATURES	PROFILE	PROFILE OF A LINE		6.5.2 (b)
		PROFILE OF A SURFACE		6.5.2 (a)
FOR RELATED FEATURES	ORIENTATION	ANGULARITY		6.6.2
		PERPENDICULARITY		6.6.4
		PARALLELISM		6.6.3
	LOCATION	POSITION		5.2
		CONCENTRICITY		5.11.3
		SYMMETRY		5.13
	RUNOUT	CIRCULAR RUNOUT		6.7.1.2.1
		TOTAL RUNOUT		6.7.1.2.2
* ARROWHEADS MAY BE FILLED OR NOT FILLED				3.3.1

Definition of cylindrical OD datum

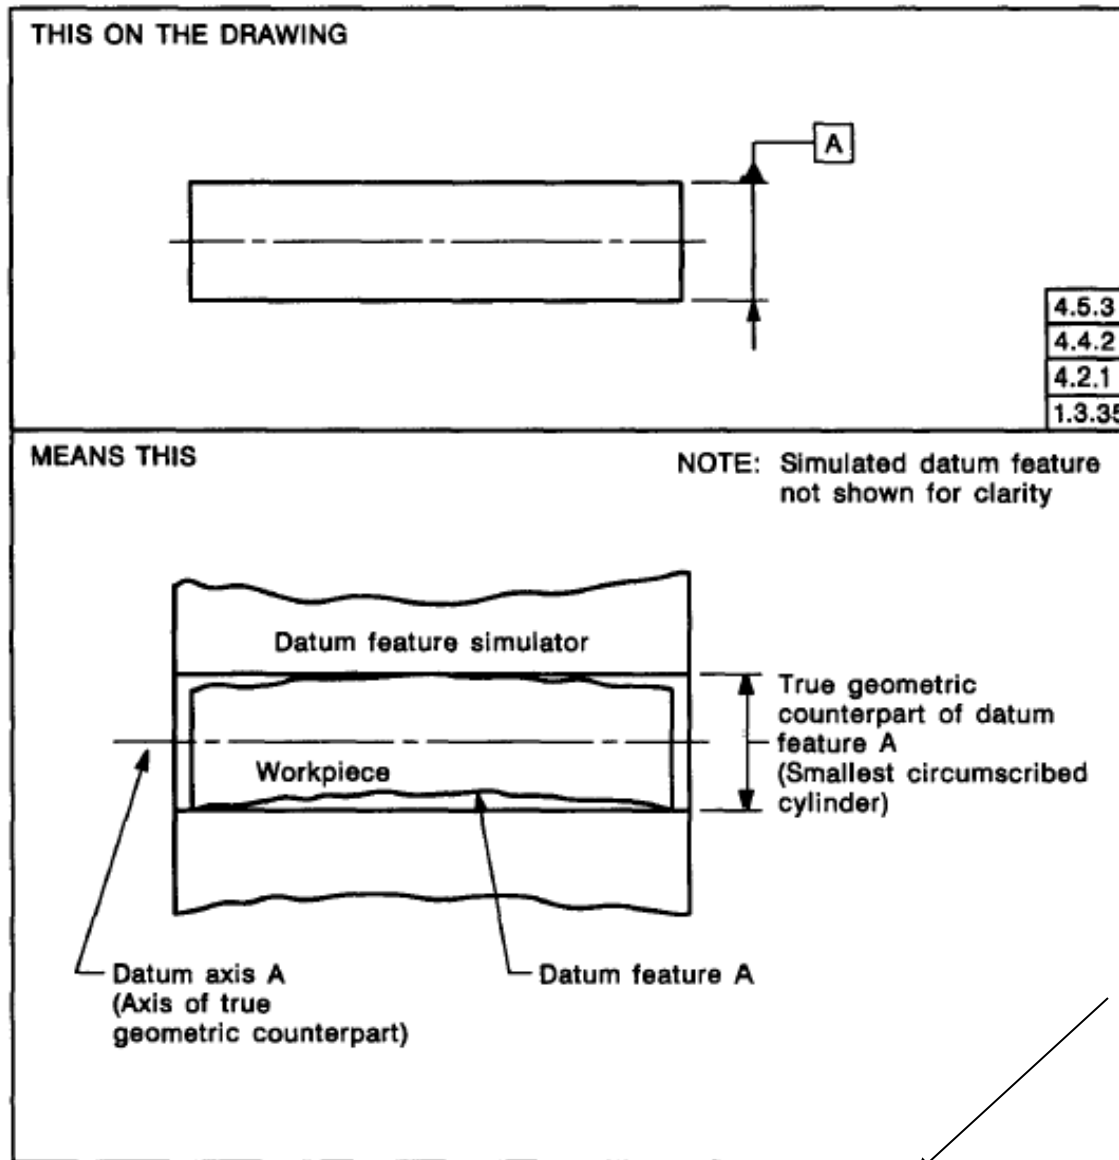


FIG. 4-11 PRIMARY EXTERNAL DATUM DIAMETER — RFS

Definition of cylindrical ID datum

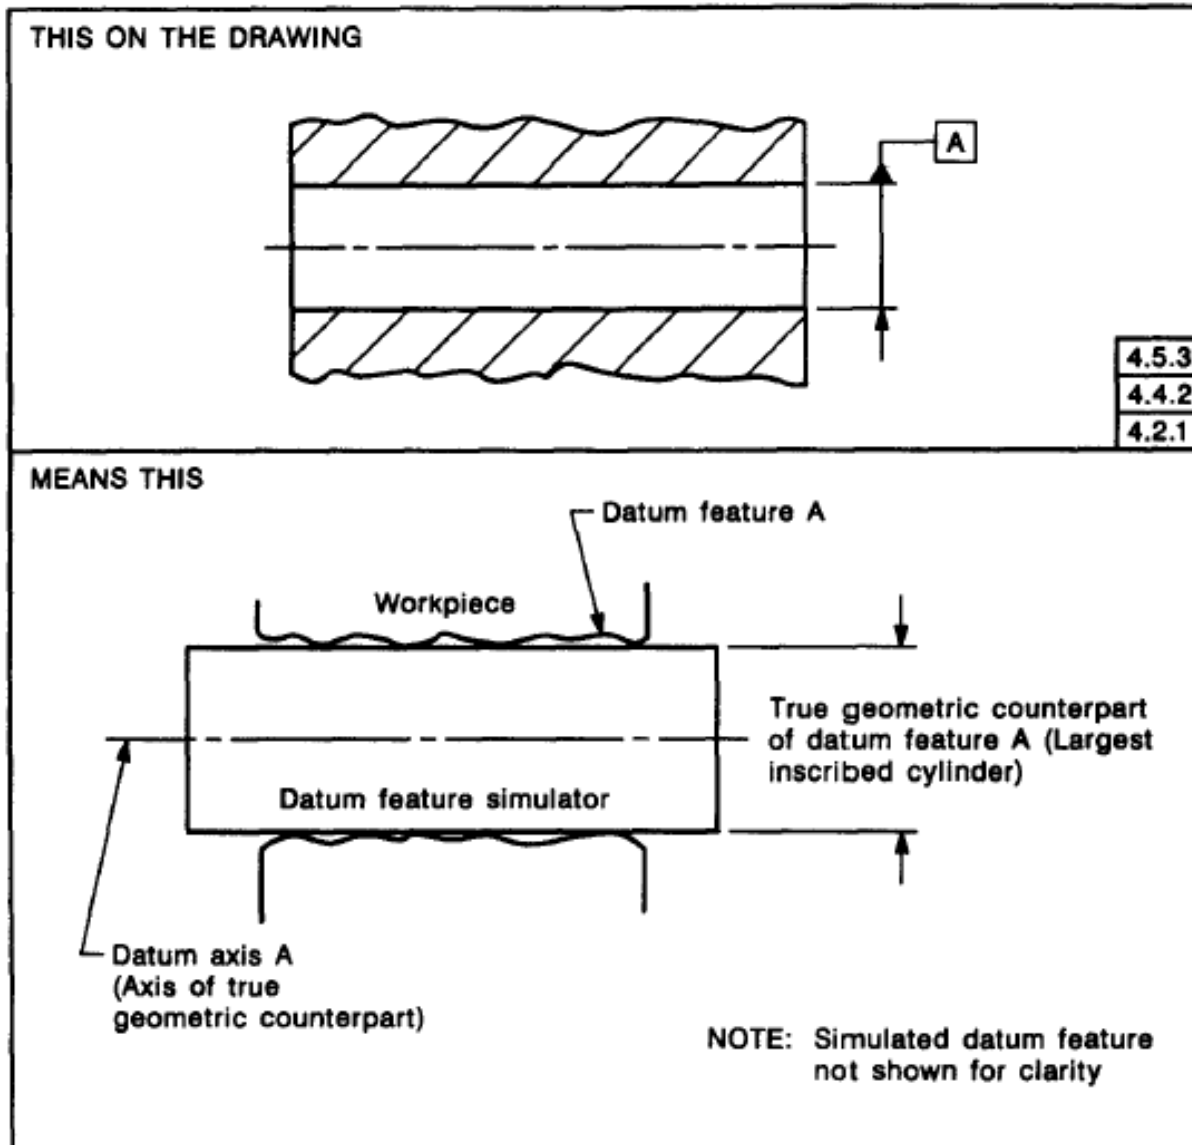


FIG. 4-12 PRIMARY INTERNAL DATUM DIAMETER — RFS

Concentricity

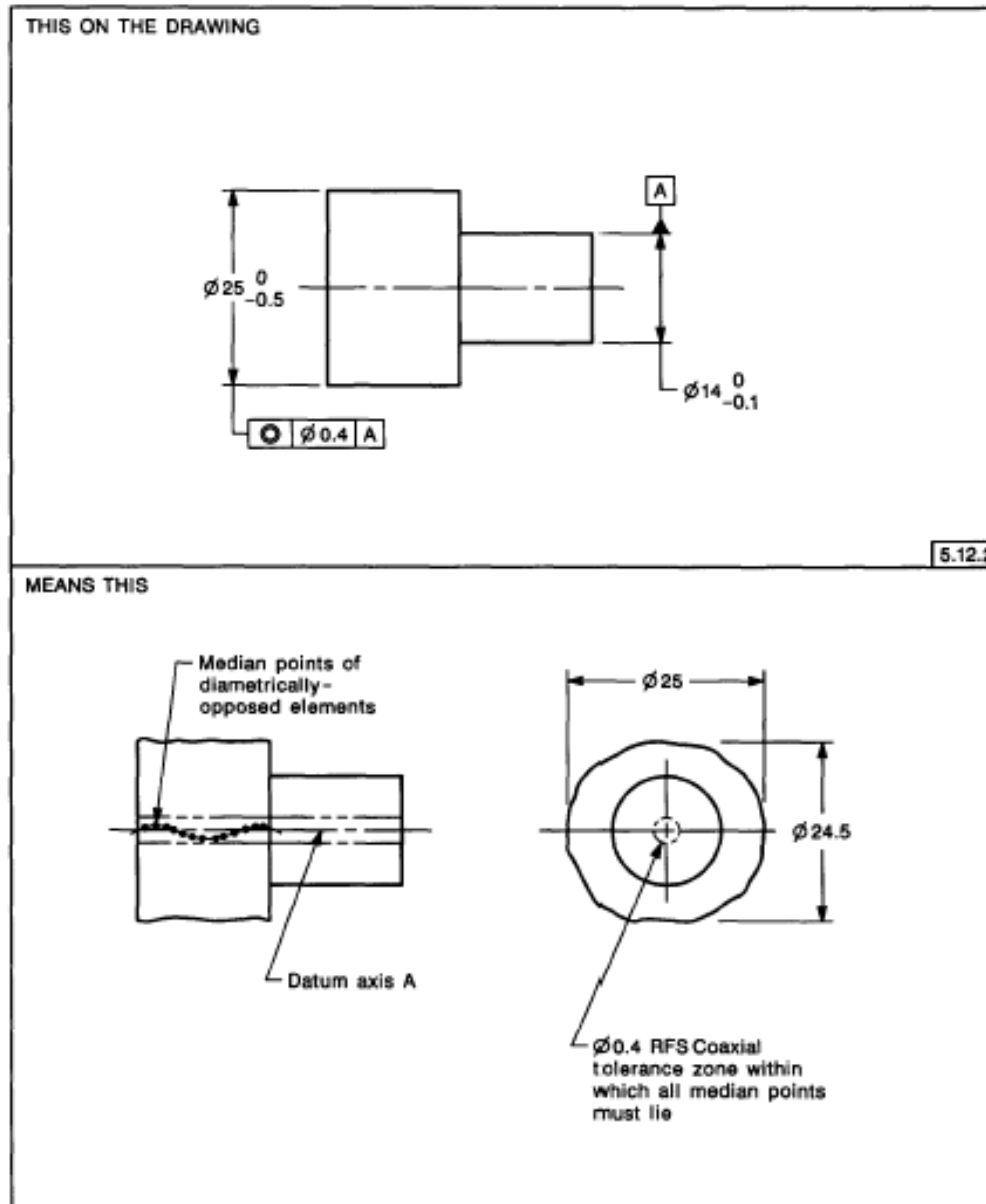


FIG. 5-58 ITEM DEPICTED IN FIG. 5-55 CONTROLLED FOR CONCENTRICITY

Circularity, Cylindricity

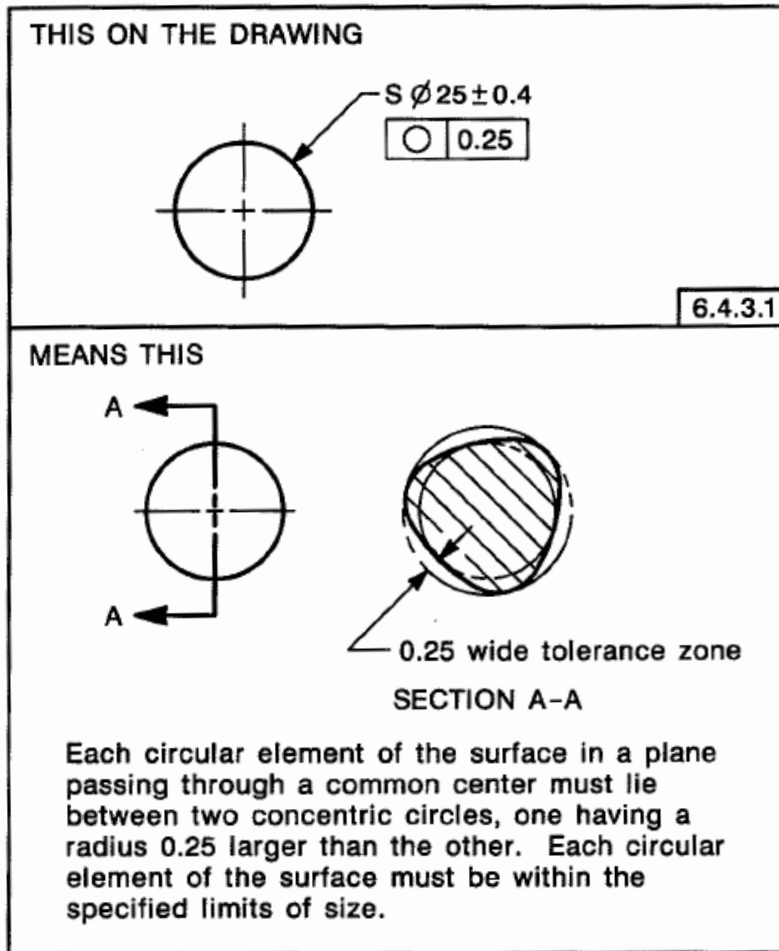


FIG. 6-9 SPECIFYING CIRCULARITY FOR A SPHERE

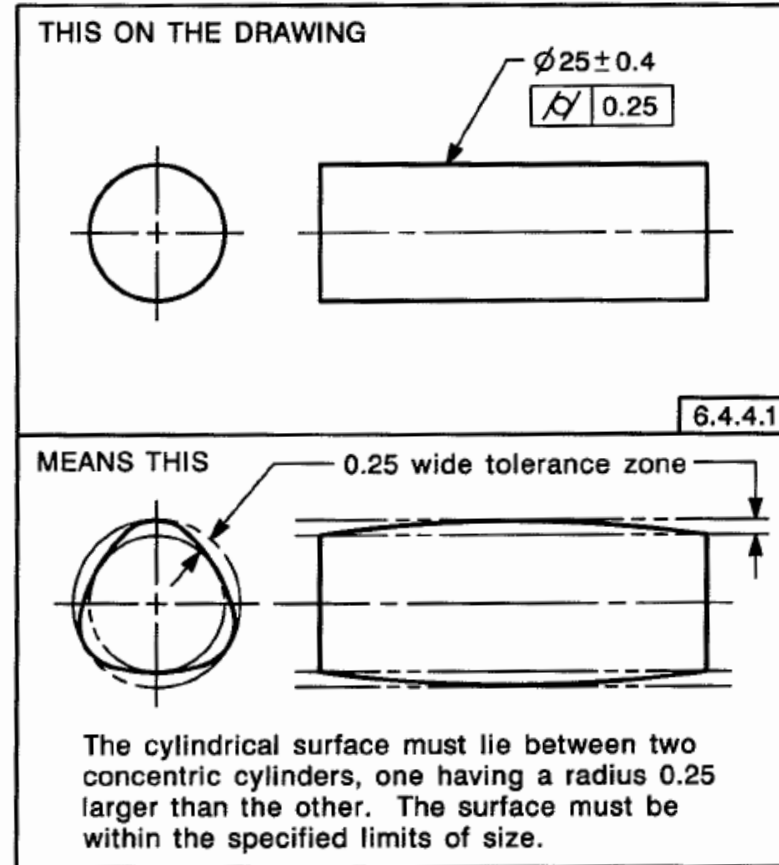


FIG. 6-10 SPECIFYING CYLINDRICITY

Surface flatness


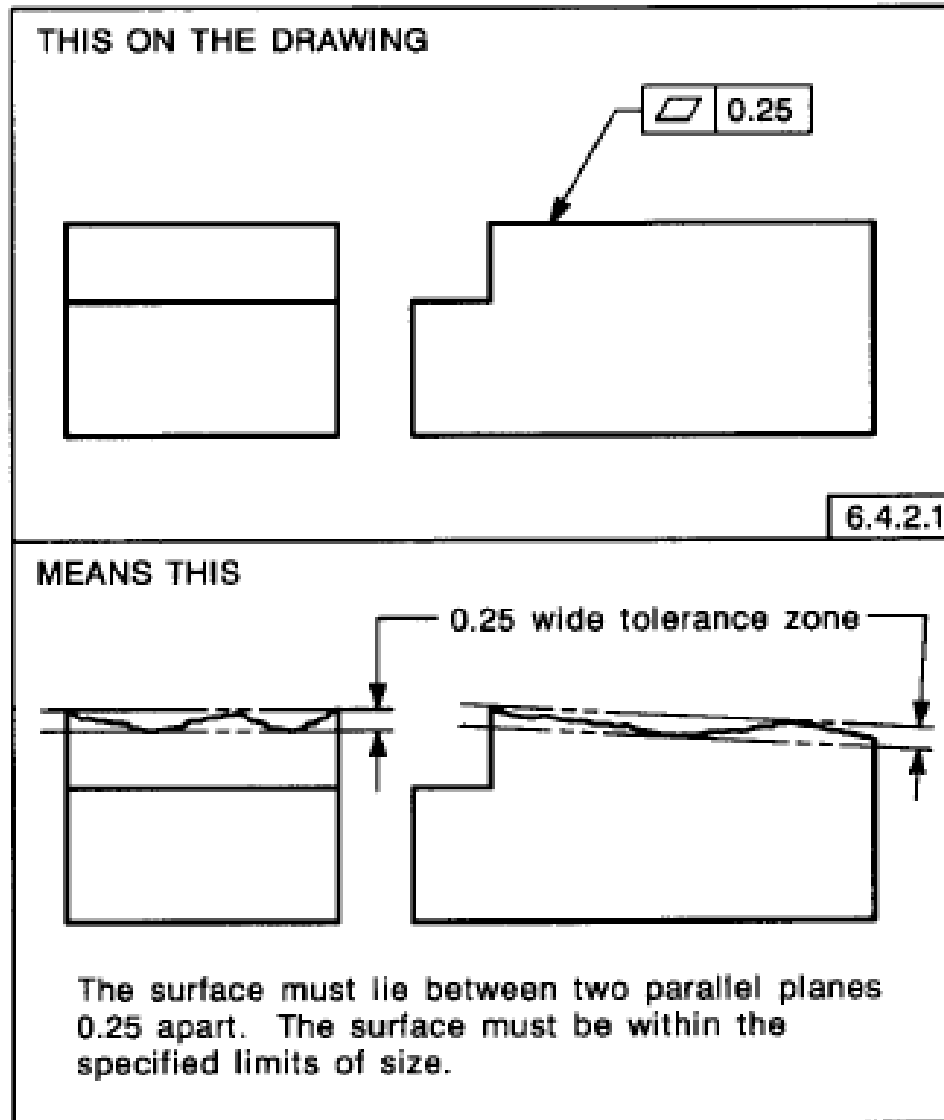


FIG. 6-7 SPECIFYING FLATNESS

Surface parallelism

General

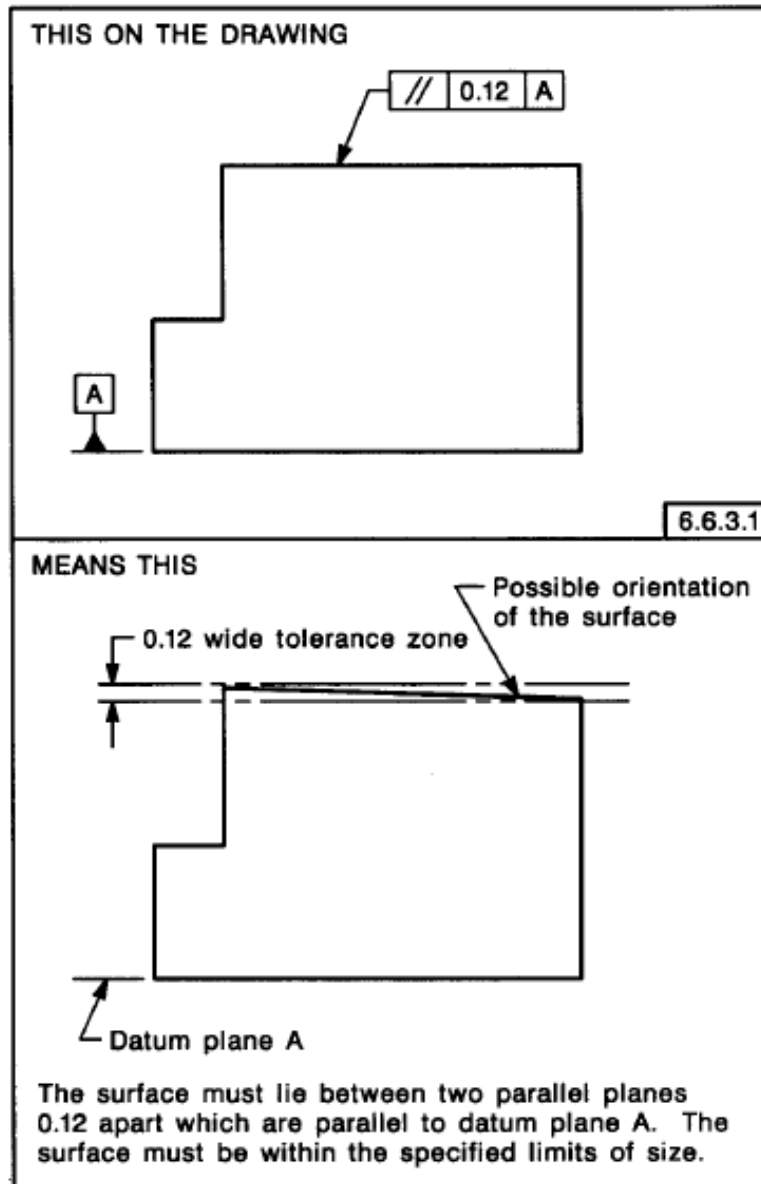

Using tangent plane

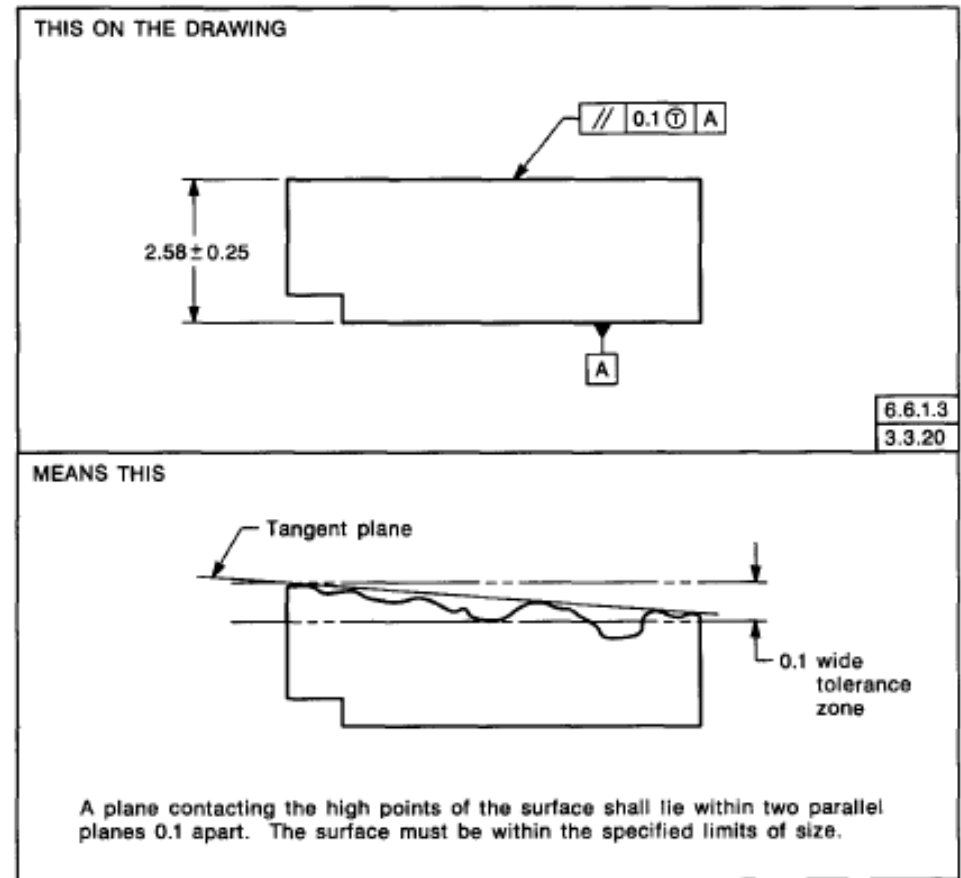


FIG. 6-43 SPECIFYING A TANGENT PLANE

Perpendicularity

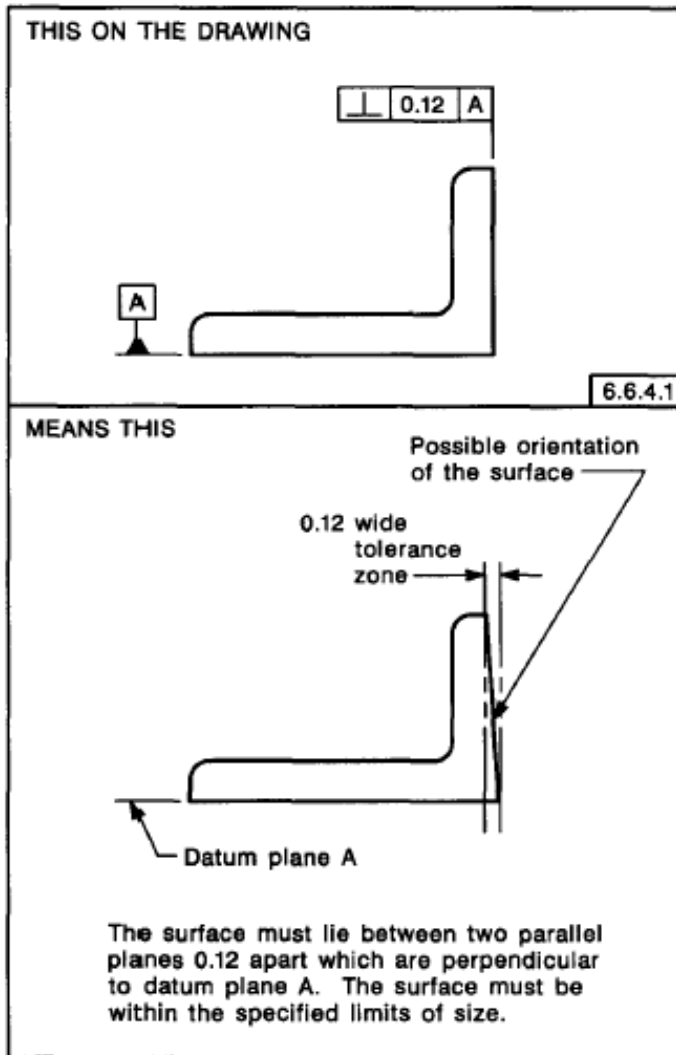


FIG. 6-34 SPECIFYING PERPENDICULARITY FOR A PLANE SURFACE

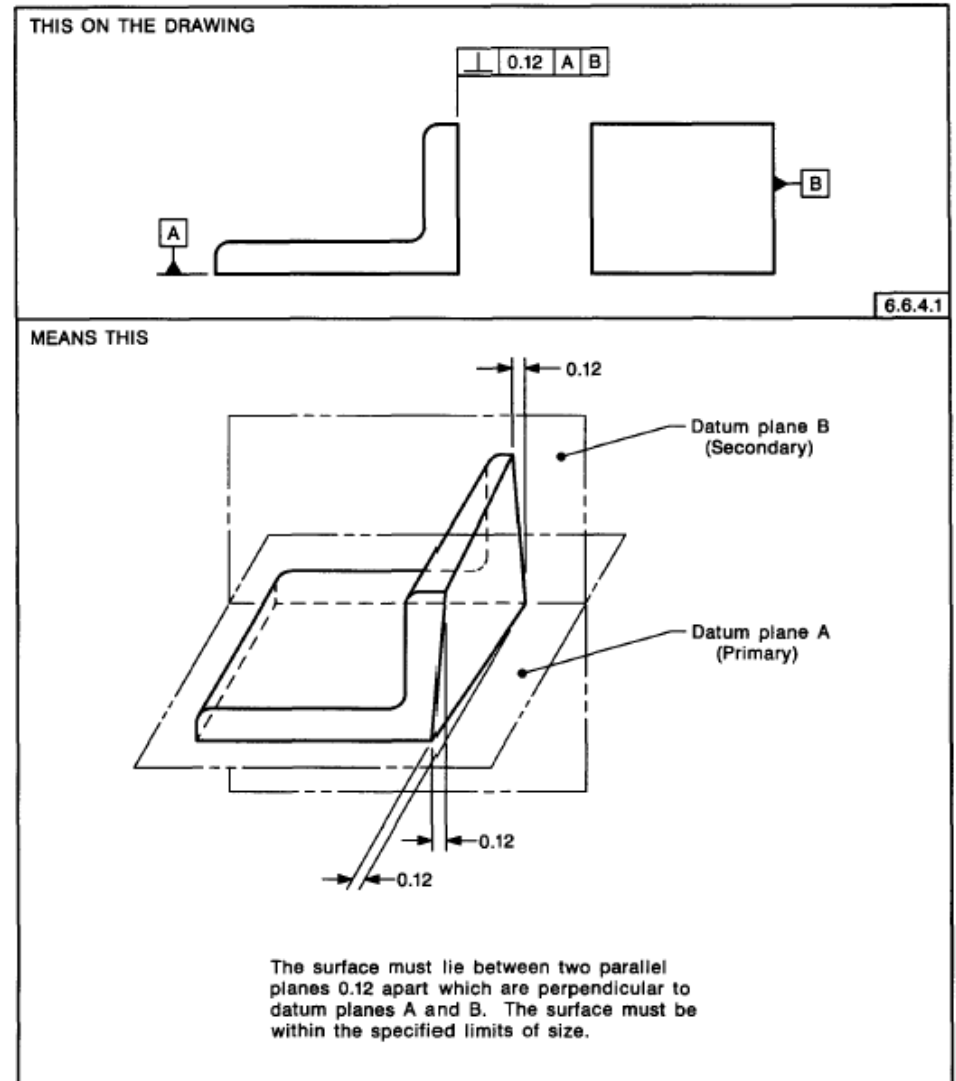


FIG. 6-35 SPECIFYING PERPENDICULARITY FOR A PLANE SURFACE RELATIVE TO TWO DATUMS

Parallelism for axis

THIS ON THE DRAWING

6.6.3.1

MEANS THIS

0.12 wide tolerance zone

Possible orientation of feature axis

Datum plane A

Regardless of feature size, the feature axis must lie between two parallel planes 0.12 apart which are parallel to datum plane A. The feature axis must be within the specified tolerance of location.

THIS ON THE DRAWING

6.6.3.1

MEANS THIS

Feature size	Diameter tolerance zone allowed
10.000	0.05
10.001	0.051
10.002	0.052
↓	↓
10.021	0.071
10.022	0.072

Where the feature is at maximum material condition (10.00), the maximum parallelism tolerance is 0.05 diameter. Where the feature departs from its MMC size, an increase in the parallelism tolerance is allowed which is equal to the amount of such departure. The feature axis must be within the specified tolerance of location.

Runout

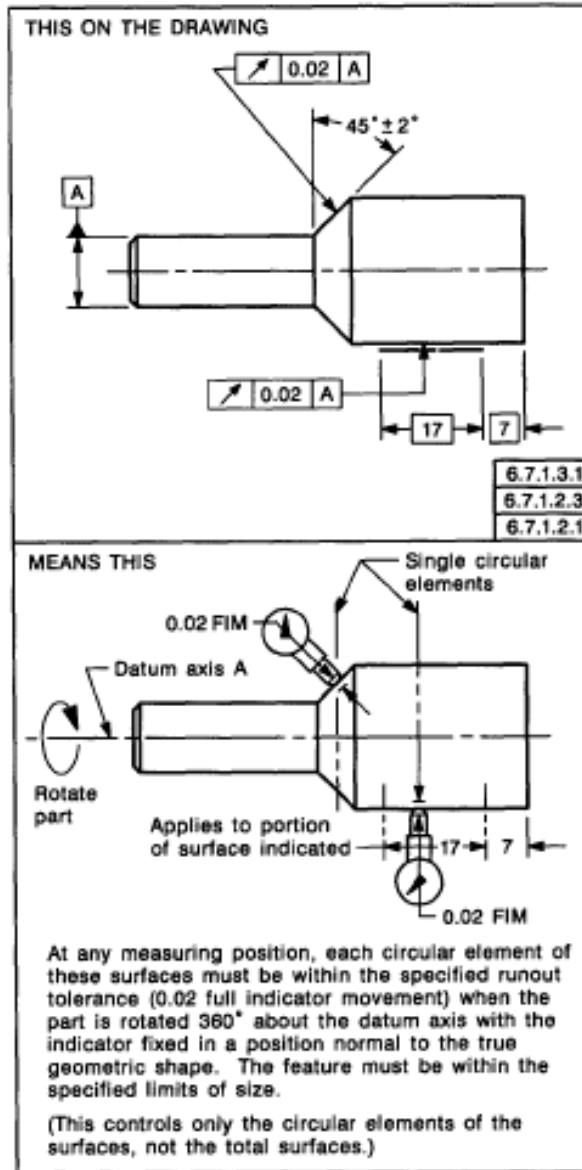


FIG. 6-47 SPECIFYING CIRCULAR RUNOUT RELATIVE TO A DATUM DIAMETER

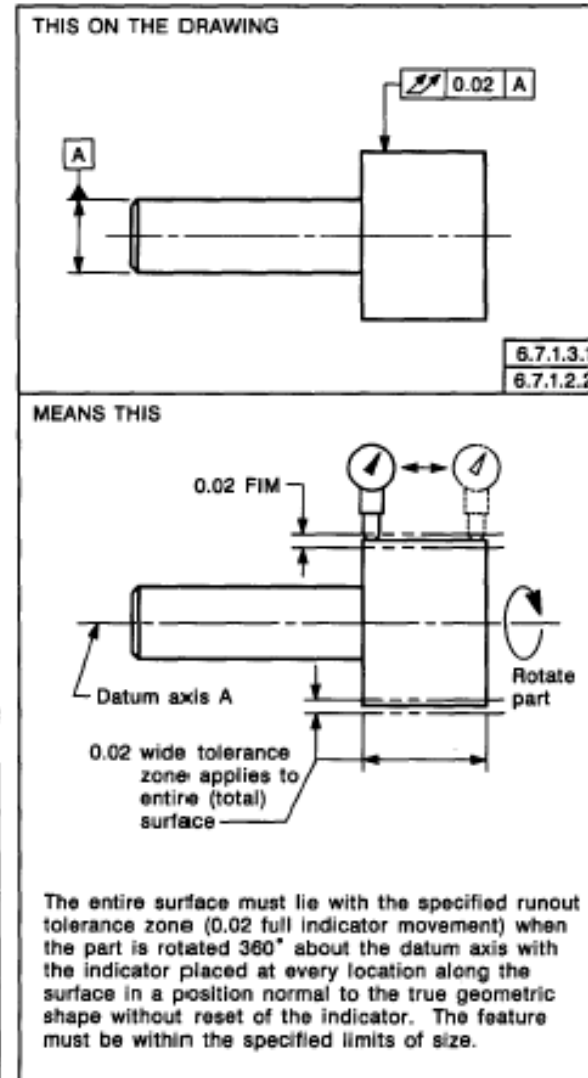


FIG. 6-48 SPECIFYING TOTAL RUNOUT RELATIVE TO A DATUM DIAMETER

Surface orientation


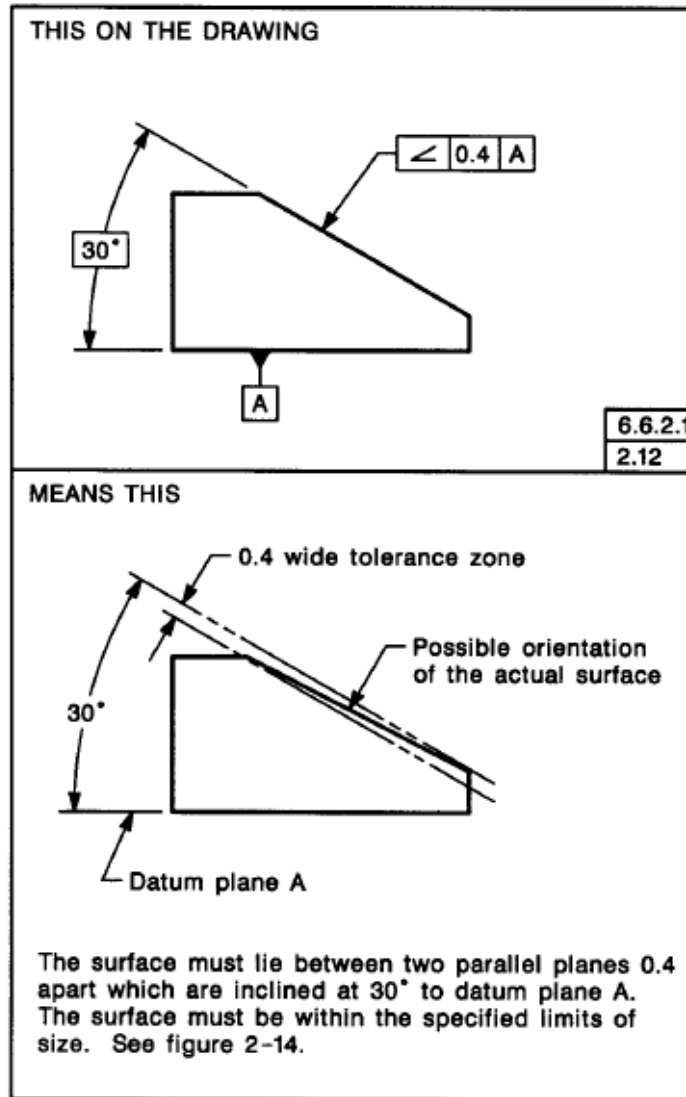


FIG. 6-27 SPECIFYING ANGULARITY FOR A PLANE SURFACE


Profile tolerance

THIS ON THE DRAWING

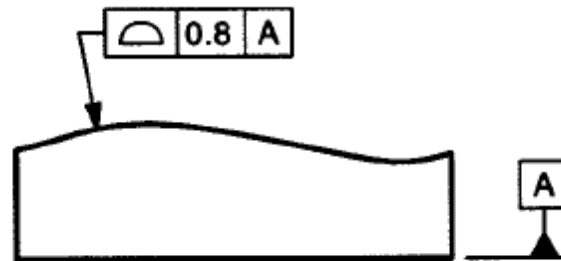


(a) Bilateral tolerance


MEANS THIS

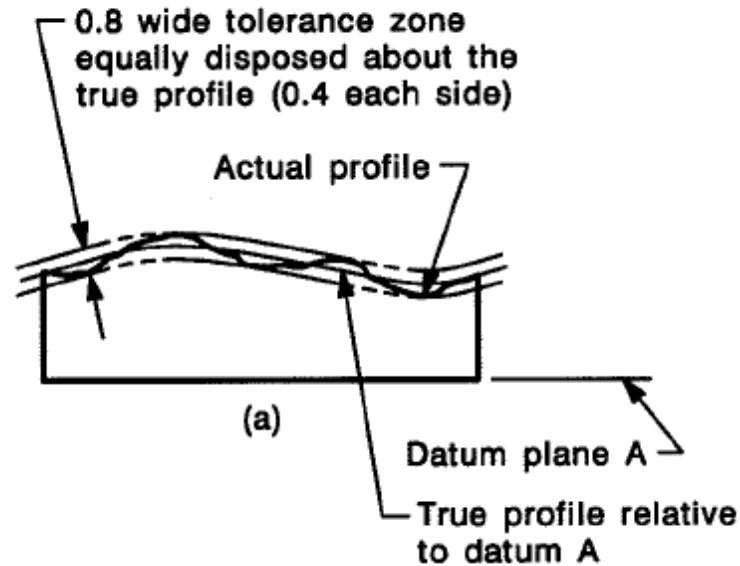


Basic dimensions



(a) Basic dimensions in polar coordinates.

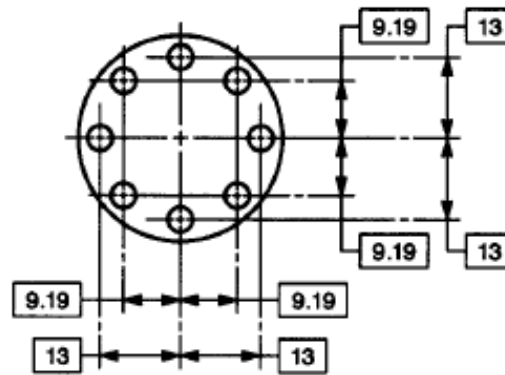

(b) Basic dimensions in rectangular coordinates.

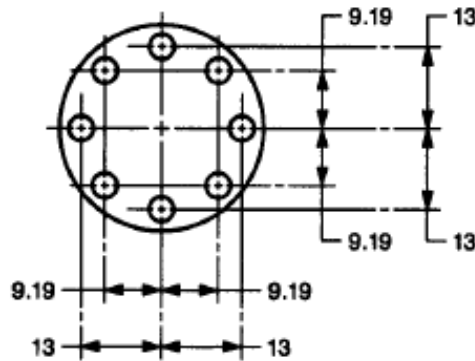

(c) Basic dimensions identified by a note.

NOTE: UNTOLERANCED DIMENSIONS LOCATING TRUE POSITION ARE BASIC

5.2.1.1

Meaning of basic tolerances

Geometric Dimensioning and Tolerancing

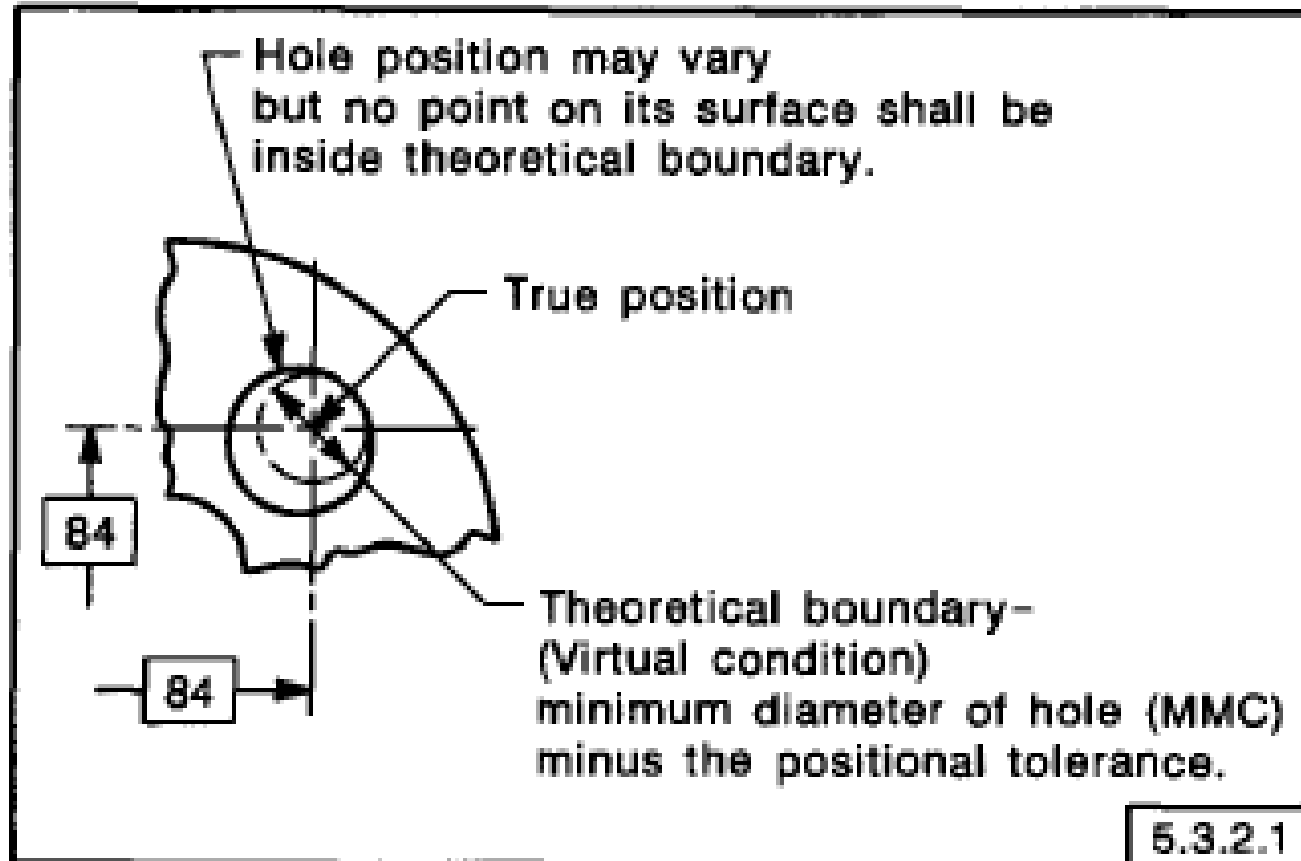


FIG. 5-5 BOUNDARY FOR SURFACE OF HOLE AT MMC

Tolerancing using basic dimensions


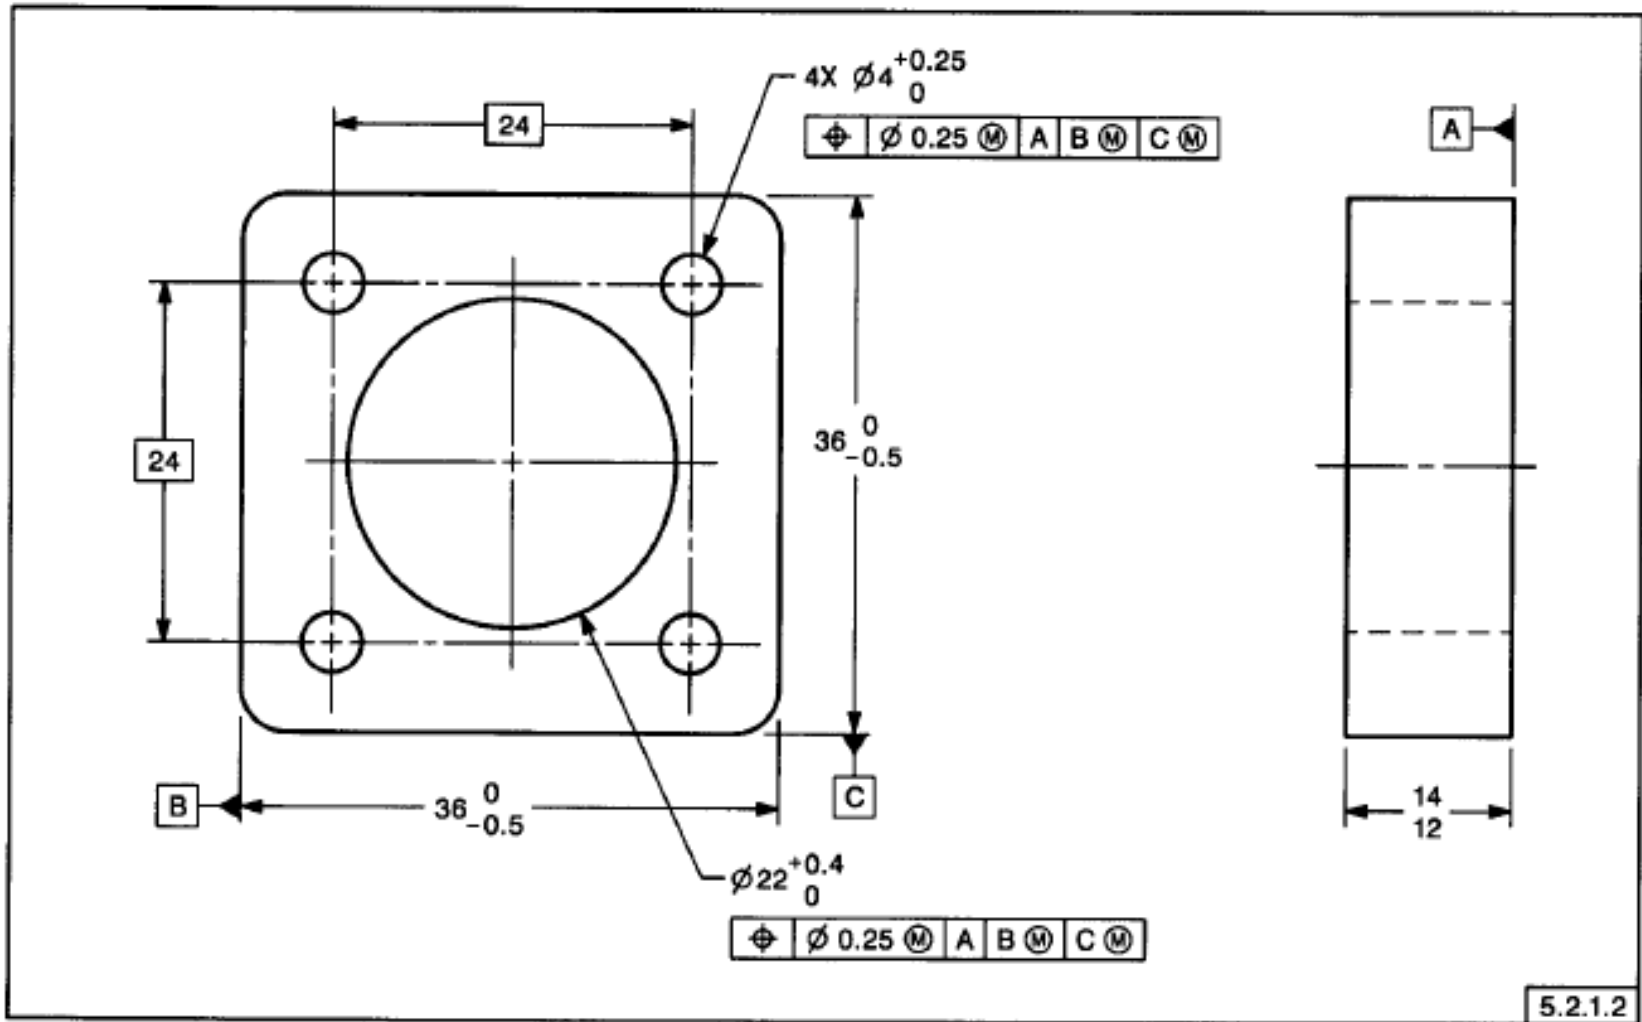


FIG. 5-4 POSITIONAL TOLERANCING AT MMC RELATIVE TO DATUM FEATURE CENTER PLANES

Example of multiple features

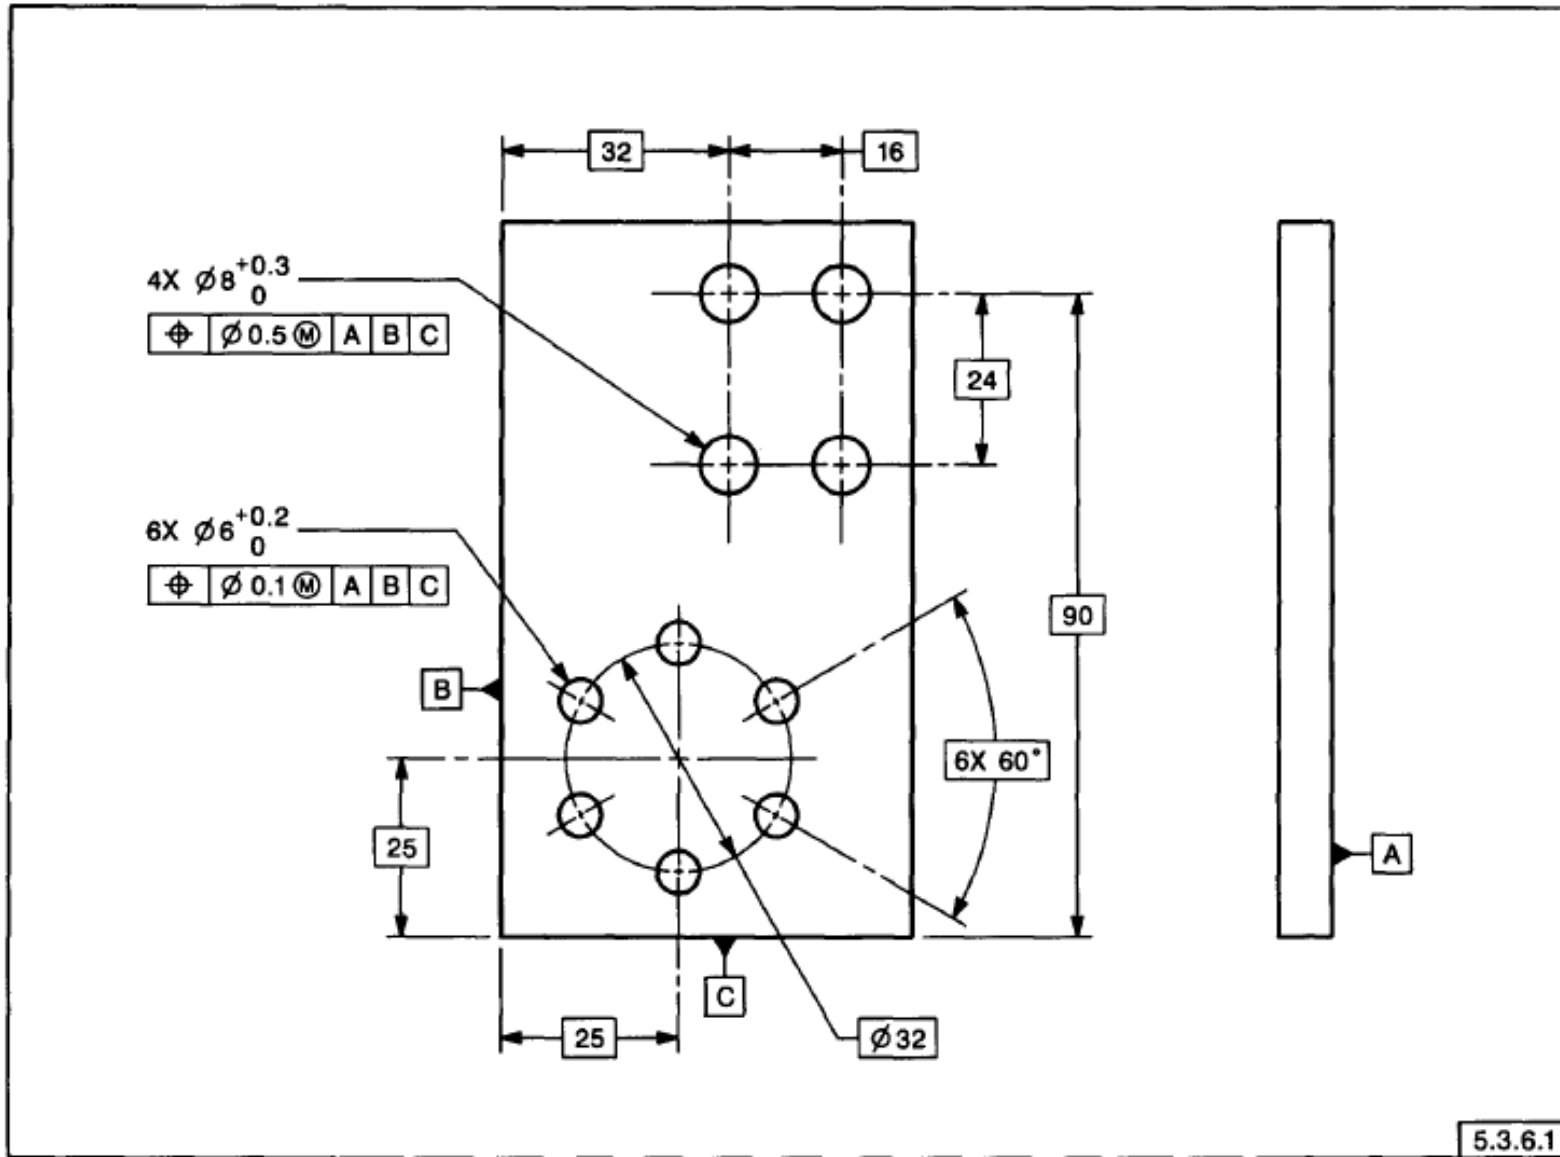

5.3.6.1

FIG. 5-16 MULTIPLE PATTERNS OF FEATURES

Tolerance zones

