


1. In the spirit of Halloween, we are going to find a ghost using a matched filter. You will need Matlab or something equivalent to do this problem. The images below are called *Skeletons.jpg* and *Ghost.jpg*, and can be downloaded from the course website.

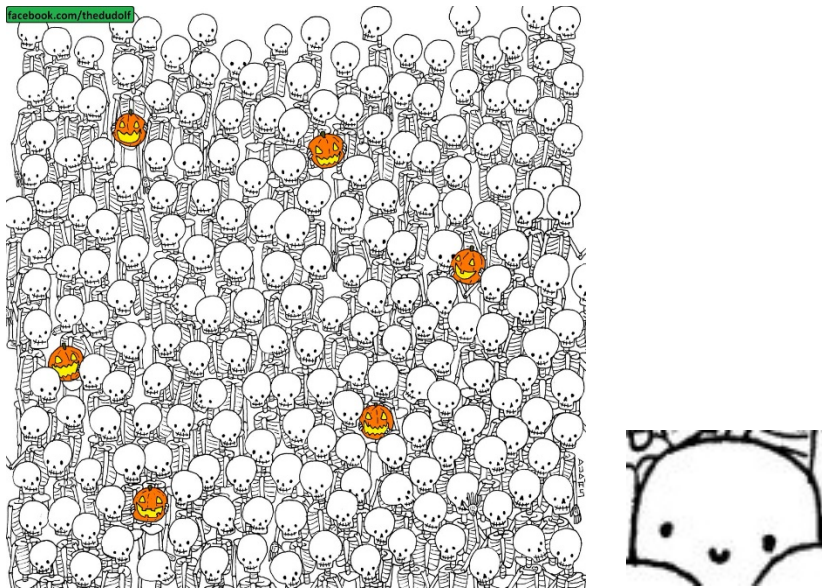

Do the following to find the ghost in a sea of skeletons:

- a) Import the file *Skeletons.jpg* and convert it to gray scale. This should be a 1200 x 1200 pixel array. What is the mean value of the array? Subtract this mean value from the array. We will call this zero-mean skeleton array $s(x, y)$.
- b) Import the file *Ghost.jpg* and convert it to gray scale. This should be a 76 x 58 pixel array. What is the mean value of this array? Subtract this mean value from the array. We will call this zero-mean ghost array $t(x, y)$ and use it as the template for the object we are trying to find in the skeleton array.
- c) Create an empty 1200 x 1200 pixel array and place the template $t(x, y)$ in the middle of the array. We will call this array the ghost array $g(x, y)$. Display this array in your

code to verify that you did it correctly. Save you ink. No need to put it in the assignment.

- d) We now want to find the cross correlation $\gamma_{sg}(x, y)$ of the two arrays. This is more easily done in the Fourier domain. We know that $\mathcal{F}_{2D}\{\gamma_{sg}(x, y)\} = S(\xi, \eta)G^*(\xi, \eta)$, where $S(\xi, \eta) = \mathcal{F}_{2D}\{s(x, y)\}$ and $G(\xi, \eta) = \mathcal{F}_{2D}\{g(x, y)\}$. Knowing this, calculate the cross correlation as $\gamma_{sg}(x, y) = \mathcal{F}_{2D}^{-1}\{S(\xi, \eta)G^*(\xi, \eta)\}$. Plot $|\gamma_{sg}(x, y)|$.
- e) What are the x, y coordinates of the maximum value of $|\gamma_{sg}(x, y)|$? Verify that the ghost is indeed located at this location in the original *Sketetons.jpg* image.

2. State whether the following functions are *band-limited* or not. If they are *band-limited*, determine the Nyquist frequency.

- a) $rect\left(\frac{x}{3}\right)$
- b) $sinc\left(\frac{x}{3}\right)$
- c) $Gaus(4x)$
- d) $tri\left(\frac{x}{2}\right)$
- e) $sinc^2\left(\frac{x}{2}\right)$
- f) $\delta(x)$
- g) $cos(5\pi x)$

3. Download the files *amp.dat* and *phase.dat* from the course website. You will need Matlab or something equivalent to do this problem. These are binary files containing 1024 x 1024 consecutive double values corresponding to 1024 x 1024 arrays of amplitude values

$A(x, y)$ and phase values $\Phi(x, y)$, respectively. For this problem, phase contrast techniques will be illustrated. Do the following:

- a) Use the following Matlab code snippet below to aid in importing the data. You will need to edit the file path accordingly.

```
fid = fopen('C:\Users\jschw\Dropbox\Class\OPTI 512 Linear Systems, Fourier  
Transforms\Homeworks\phase.dat','rb');  
phase = fread(fid, [1024 1024], 'double');  
imshow(phase,[])
```

```
fid = fopen('C:\Users\jschw\Dropbox\Class\OPTI 512 Linear Systems, Fourier  
Transforms\Homeworks\amp.dat','rb');  
amp = fread(fid, [1024 1024], 'double');  
imshow(amp,[])
```

Plot the patterns $A(x, y)$ and $\Phi(x, y)$.

- b) Create the complex array $f(x, y) = A(x, y)\exp[-i\Phi(x, y)]$. This will be the input to our phase contrast system. Sensors and our eyes can only record the squared magnitude of complex signals or $|f(x, y)|^2$. Plot $|f(x, y)|^2$ for this input.
- c) The transfer function for this system is

$$H(\xi, \eta) = \begin{cases} \exp\left(i\frac{\pi}{2}\right) & \text{for } \xi = \eta = 0, \\ 1 & \text{otherwise} \end{cases},$$

so calculate $F(\xi, \eta)$ using the FFT routines in Matlab and then multiply $F(0,0)$ by $\exp\left(i\frac{\pi}{2}\right)$ to create the output $G(\xi, \eta)$. Be careful with the shifting that occurs with the FFT and also note that Matlab starts its arrays with a value of 1 instead of 0. Finally,

calculate output of the phase contrast system with the inverse FFT routines to get $g(x, y)$. Plot $|g(x, y)|^2$.